

Data Update (DATUP) 4.0.1

Installation Guide



July 2024

Department of Veterans Affairs (VA)

Office of Information and Technology (OIT)

REVISION HISTORY

Date	Revised Pages	Patch Number	Description
07/12/2024		PRED*4*2	<ul style="list-style-type: none"> • Updated DATUP to version 4.0.1 • Updated sections: <u>3.3</u>, <u>3.5.2</u>, <u>3.5.3</u>, <u>3.5.4</u>, <u>3.6.2</u>, <u>5.1</u> • Updated the Title page, Revision History, Table of Contents, List of Figures, List of Tables, and Footers • Liberty IT Solutions
06/05/2024	All	PRED*4*1	<ul style="list-style-type: none"> • Updated DATUP version to 4.0 • Updated FDB-DIF to FDB45_DIF • Updated section <u>3.4.3</u> • Updated section <u>3.2</u> with current version of WebLogic, Java, Oracle, and RHEL • Updated section Appendix B • Updated Figures: <u>Figure 2</u>, <u>Figure 4</u>, <u>Figure 5</u>, <u>Figure 6</u>, <u>Figure 8</u>, <u>Figure 10</u>, <u>Figure 11</u>, <u>Figure 13</u>, <u>Figure 14</u>, <u>Figure 15</u>, <u>Figure 16</u>, <u>Figure 17</u>, <u>Figure 19</u>, <u>Figure 20</u>, <u>Figure 22</u>, <u>Figure 23</u>, <u>Figure 24</u>, <u>Figure 25</u>, <u>Figure 27</u>, <u>Figure 30</u>, <u>Figure 32</u>, <u>Figure 33</u>, <u>Figure 34</u>, <u>Figure 35</u>, <u>Figure 37</u>, <u>Figure 38</u>, <u>Figure 39</u>, <u>Figure 40</u>, <u>Figure 41</u>, <u>Figure 43</u>, <u>Figure 44</u>, <u>Figure 45</u>, <u>Figure 46</u>, <u>Figure 49</u>, <u>Figure 50</u> • Updated the Title page, Revision History, Table of Contents, List of Figures, List of Tables, and Footers • (Liberty IT Solutions)
03/15/2021	Title, i, iv, v, vi, 13, 33, 34, 35,36, 37, 38, 39, 42, 43, 44, 47, C-1 – C-5, all	PRED*3*3	<ul style="list-style-type: none"> • Updated DATUP version to 3.1.01 for RTM and Fortify mitigations fixes • Updated the entire step 8, “<u>Insert...</u>” of section 3.4.2, Weblogic Server Startup Configuration • Updated the entire section of <u>3.4.5</u>, <u>Log4j2</u> • Updated Figure 3-6. Server Start Tab, <u>Figure 3-6</u>, <u>Figure 3-30</u>, <u>Figure 3-31</u>, <u>Figure 3-32</u>, <u>Figure 3-33</u>, <u>Figure 3-34</u>, <u>Figure 3-35</u>, <u>Figure 3-36</u>, <u>Figure 3-39</u>, <u>Figure 3-40</u>, <u>Figure 3-41</u>, <u>Figure 4-3</u>, <u>Figure 4-4</u>, <u>Figure 4-5</u>, <u>Figure 4-6</u> • Updated the entire section of <u>5.1</u>, <u>Verification</u> • Updated the entire Appendix C: log4j2

Date	Revised Pages	Patch Number	Description
			<ul style="list-style-type: none"> Updated the Title page, Revision History, Table of Contents, List of Figures, List of Tables, and Footers (Liberty ITS)
February, 2017	Many	N/A	Updated Version number for DATUP v3.0.01 which has the code changes to fix the SFTP connection issue with Centrif/Active Directory. REDACTED
April, 2016	All	N/A	Tech edited REDACTED
March 31, 2016	Many	N/A	Updated references to build number; added backout steps.
January 19, 2015	All	N/A	Tech edited REDACTED
December 18, 2015		N/A	Updated REDACTED
May 28, 2015	All	N/A	Updated for DATUP 3.0 REDACTED
May 27, 2015	All	N/A	Tech edit performed. REDACTED
July 18, 2014	All	N/A (First Release)	Updated date to reflect real release date. REDACTED
June 6, 2014	All	N/A (First Release)	Updated TOC
June 3, 2014	All	N/A (First Release)	Fixed pagination, added table caption. REDACTED
May 30, 2014	All	N/A (First Release)	Added footnote describing relationship between FDB MedKnowledge Framework and FDB-DIF, updated text appropriately. Updated TOC. REDACTED
May 28, 2014	All	N/A (First Release)	Updated images for 508 compliance; changed FDB MedKnowledge Framework back to FDB-DIF. Updated TOC REDACTED
May 27, 2014	All	N/A (First Release)	Updated Revision History format; did a partial search and replace on FDB-DIF (and similar phrases) to FDB MedKnowledge Framework, though not in the instructions as the tool may not be updated yet. Removed extraneous definitions of FDB. Minor text edits. REDACTED

Date	Revised Pages	Patch Number	Description
May 21, 2014	All	N/A (First Release)	Updated Title Page, Changed Pagination for Table of Figures, Updated Version number on Overview, Corrected missing graphics REDACTED
May 19, 2014	All	N/A (First Release)	Updated diagrams, minor formatting changes. REDACTED, REDACTED
May 13, 2014	All		Changed per CPS and changed the version number of the application throughout; fixed footers & TOC REDACTED
May 22, 2013	E-1		Edited to include rollback procedures REDACTED
February 7, 2013	All		Tech Writer Edits REDACTED
February 5, 2013	All		Updates to various sections for DATUP 2.0 and added Appendix D to address Image Processing Workaround. REDACTED
February 1, 2013	All		Incorporated changes to the database section to clarify instructions, updated title page and footer to reflect updates for DATUP 2.0 REDACTED
August 27, 2012	All		Changed formatting and edited document REDACTED
May 29, 2012	D-1		Updated the document to address change request #CR5172 (Image Processing for PPS) REDACTED
Sept 14, 2012	All		Updates to various section to address minor configuration changes REDACTED
November 12, 2010	All		Updated the document to address change request #CR2942. SwRI
October 8, 2010	All		Renamed all instances of "PEDTUP" to "DATUP". SwRI
September 3, 2010	All		National PEDTUP Installation Guide: Initial version. SwRI

The Veteran-focused Integrated Process (VIP) 4.0 Guide indicates the VA Product (Line) Accountability and Reporting System (VA PARS) reporting tool requires a Gateway Review that will move the project from the Planning Stage and to the Build Stage and will require Release Approval before deploying into

production. The Product Line Manager will ensure necessary documents are made available for the release approval process.

TABLE OF CONTENTS

1	Project Scope	1
1.1	Project Description.....	1
1.2	PRE Project Goals and Objectives	1
1.3	DATUP Background.....	1
1.4	Related Documents	1
2	Document Overview	2
2.1	Document Background.....	2
2.2	Overview	2
3	Installation Instructions	4
3.1	Terminology.....	5
3.2	Assumptions.....	5
3.3	Background Processes	6
3.4	Database Installation and Configuration	7
3.4.1	Oracle Database.....	7
3.4.2	Oracle Installation.....	7
3.4.3	Oracle Database Parameters	7
3.4.4	Oracle Schema Creation for DATUP	7
3.4.5	Oracle Configuration and Data Load.....	9
3.5	WebLogic Installation Instructions	9
3.5.1	Class Path.....	9
3.5.2	WebLogic Server Startup Configuration	10
3.5.3	National FDB45_DIF Data Source Configuration.....	13
3.5.4	National JDBC DATUP Data Source Configuration.....	20
3.5.5	Log4j2.....	26
3.6	DATUP Configuration Properties.....	26
3.6.1	DATUP Cleanup Script.....	26
3.6.2	Deployment.....	26
4	Upgrade Installation Instructions	36
4.1	Uninstall Previous Release.....	36
4.2	Deploy New Release.....	39
4.3	Backout Build.....	39
5	System Verification	40
5.1	Verification.....	40
	Appendix A: DATUP Configuration	42
	Appendix B: Combined DATUP / PECS / PPS-N Architecture	49
	Appendix C: log4j2.xml	50
	Appendix D: Rollback Process	55

List of Tables

Table 1: Terminology.....	5
Table 2: Summary of Steps for Creating Oracle Schema.....	8

List of Figures

Figure 1: WebLogic Console.....	4
Figure 2: Domain Structure.....	10
Figure 3: Change Center.....	10
Figure 4: Summary of Servers.....	11
Figure 5: Settings for Deployment Server.....	11
Figure 6: Server Start Tab.....	12
Figure 7: Activate Changes.....	13
Figure 8: Domain Structure.....	13
Figure 9: Change Center.....	14
Figure 10: Summary of JDBC Data Sources.....	14
Figure 11: JDBC Data Source Properties.....	15
Figure 12: Transaction Options.....	16
Figure 13: Connection Properties.....	17
Figure 14: Test Database Connection.....	18
Figure 15: Select Targets.....	19
Figure 16: Summary of JDBC Data Sources.....	19
Figure 17: Domain Structure.....	20
Figure 18: Change Center.....	20
Figure 19: Summary of JDBC Data Sources.....	21
Figure 20: JDBC Data Source Properties.....	21
Figure 21: Transaction Options.....	22
Figure 22: Connection Properties.....	23
Figure 23: Test Database Connection.....	24
Figure 24: Select Targets.....	25
Figure 25: Summary of JDBC Data Sources.....	25
Figure 26: Activate Changes.....	25
Figure 27: Domain Structure.....	27
Figure 28: Change Center.....	27
Figure 29: Deployments.....	28
Figure 30: Locate Deployment to Install and Prepare for Deployment.....	28
Figure 31: Choose Targeting Style.....	29
Figure 32: Select Deployment Targets.....	29
Figure 33: Optional Settings.....	30
Figure 34: Review Your Choices and Click Finish.....	31
Figure 35: Settings for DATUP.....	32
Figure 36: Activate Changes.....	32
Figure 37: Domain Structure.....	33
Figure 38: Summary of Deployments.....	33
Figure 39: Start Application Assistant.....	33
Figure 40: Summary of Deployments – DATUP Deployment Active.....	34
Figure 41: Domain Structure.....	36
Figure 42: Change Center.....	37
Figure 43: Summary of Deployments – Stopping DATUP.....	37
Figure 44: Force Stop Application Assistant.....	37

Figure 45: Summary of Deployments – DATUP Deployment Prepared.....	38
Figure 46: Delete Application Assistant.....	38
Figure 47: Summary of Deployments – DATUP Deployment Deleted.....	39
Figure 48: Activate Changes.....	39
Figure 49: DATUP Server Log.....	40
Figure 50: Combined DATUP/PECS/PPS-N Architecture Diagram.....	50

(This page included for two-sided copying.)

1 Project Scope

1.1 Project Description

The goal of the Veterans Health Administration (VHA) Pharmacy Re-Engineering (PRE) project is to design and develop a re-engineered pharmacy system, incorporating changes that have been made to the Enterprise Architecture, and changes in pharmacy business processes. The intent of the PRE program is to ensure that no current system functionality is lost, but that it is either replicated in the new system or replaced by improved process and functionality. While the overall plan is still based on designing and implementing a complete pharmacy system, the scope of the effort has been defined to address a focused subset of the PRE functionality confined to the Data Update (DATUP) process.

1.2 PRE Project Goals and Objectives

The objective of the PRE project is to facilitate the improvement of pharmacy operations, customer service, and patient safety for the VHA. The PRE project will help address the identified goals and vision for the VHA Pharmacy System.

The goal for the PRE project is a seamless and integrated nationally-supported system that is an integral part of the HealthVet-Veterans Health Information Systems & Technology Architecture (VistA) environment. To meet this goal, the PRE project will enhance pharmacy data exchange, as well as clinical documentation capabilities, in a truly integrated fashion to improve operating efficiency and patient safety. Additionally, it will provide a flexible technical environment to adjust to future business conditions and to meet patient needs in the clinical environment. Achieving this goal will enable resolution of current pharmacy issues, improve patient safety, and facilitate long-term process stability.

1.3 DATUP Background

DATUP is an utility that runs an automated process to maintain the First Databank (FDB) – Drug Information Framework (DIF) and VA custom data.

First Databank MOCHA conducts order checks using First Databank (FDB) MedKnowledge Framework within the existing VistA pharmacy application. FDB is a data product that provides the latest identification and safety information on medications. Additionally, FDB provides the latest algorithms used to perform order checks. DATUP processes the data updates associated with FDB MedKnowledge Framework (Fwk). The order checks performed by MOCHA include:

- Drug-Drug Order Check – Check interactions between two or more drugs, including interaction monographs.
- Duplicate Therapy Order Check – Check for duplicated drug classifications between two or more drugs.
- Drug-Dose Order Check – Check minimum and maximum single doses, verify the dosing schedule, and provide the normal dosing range.

1.4 Related Documents

A complete list of documents relating to the PRE project and the DATUP development effort can be found in the Glossary and Acronym List (Version 5.0, dated September 26, 2008).

2 Document Overview

The information contained in this DATUP Installation Guide is specific to DATUP development, which supports the MOCHA system. This section defines the layout of this document and provides an outline of the document structure.

2.1 Document Background

This document details the steps required to install the DATUP software at a national site, the terminology used for the configuration and deployment of the software, and the assumptions for installing the software. Additionally, this document details how to install and configure the database environment. This document accompanies the delivery of the DATUP version (v) 4.0.1 software release. The DATUP Version Description Document (VDD) is delivered as a companion document to this Installation Guide. Refer to the VDD for more information on the software inventory and versions used in the DATUP v4.0.1 software release.

2.2 Overview

The following list provides a brief description of the sections included in this document:

- Section 1: Provides introductory material delineating the purpose of the PRE project and the scope of the MOCHA effort.
- Section 2: Presents an overview of the layout of the document.
- Section 3: Presents the installation instructions for the DATUP v4.0.1 software release.
- Section 4: Details the steps required to perform an installation when an existing version is already deployed.
- Section 5: Presents verification steps to verify that the installation was successful.

Text in a `Courier New` font indicates WebLogic Console panels or text, commands, and settings that must be typed, executed, or configured to complete the installation.

(This page included for two-sided copying.)

3 Installation Instructions

The following instructions detail the steps required to perform a fresh installation of the DATUP software at a national site. For upgrade installation instructions see Section 4. Section 3.1 details the terminology used for the configuration and deployment of the DATUP software. Section 3.2 outlines the assumptions for installing the DATUP software. While the system may be configured to run outside the given assumptions, doing so requires modifications that are not detailed in this document. Section 3.4 describes how to install and configure the DATUP software properly. Finally, Section 3.4 describes how to install and configure the database environment.

In order to understand the installation and verification process, the reader should be familiar with the WebLogic console shown in Figure 1. The WebLogic console is a Web page viewable from any Internet browser. The WebLogic console is generally divided into two sections. The left section contains the Change Center, Domain Structure, and other informational panels. The right section displays panels containing additional options or configuration details. Note: With the exception of the Change Center and Domain Structure references, further references to WebLogic console panels refer to panels in the right section of the WebLogic console.

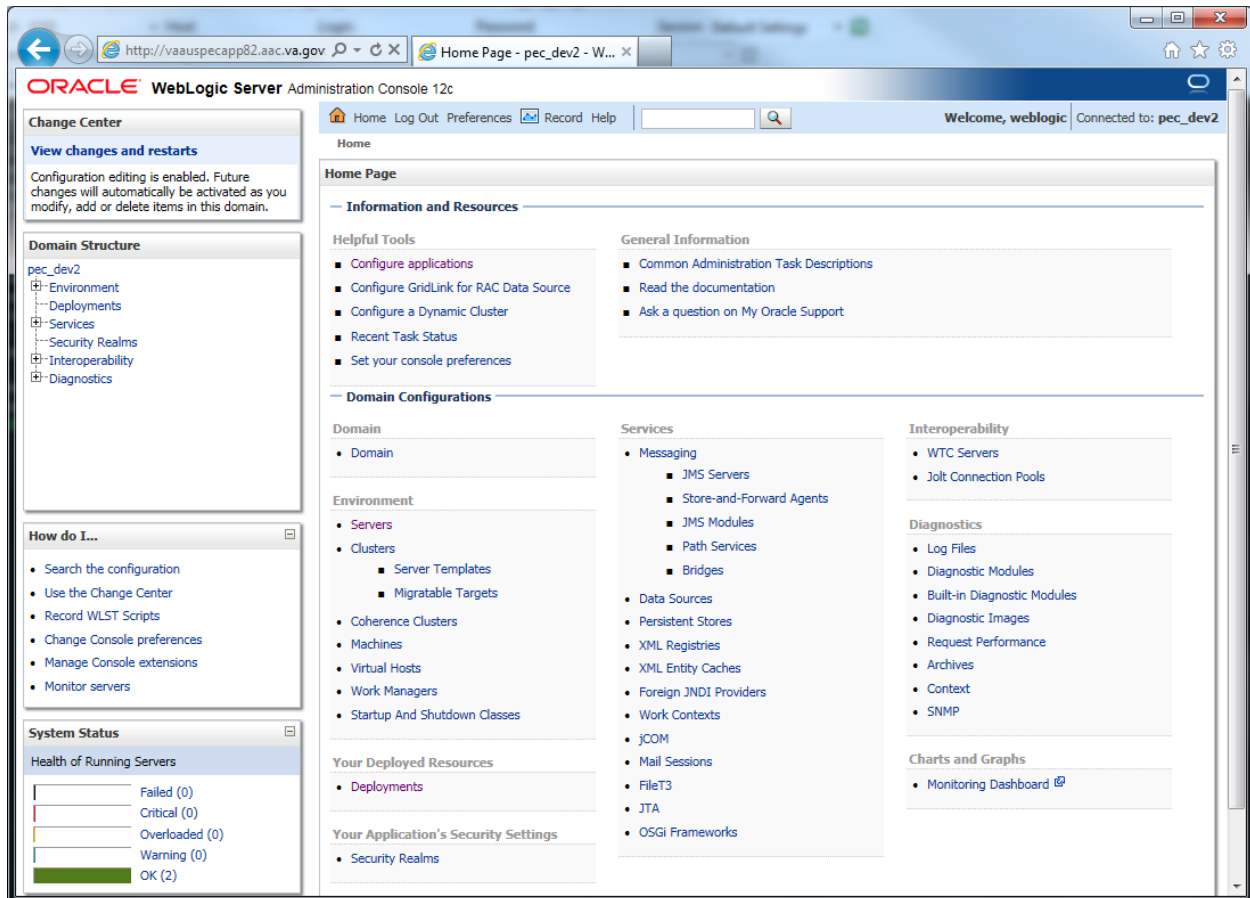


Figure 1: WebLogic Console

3.1 Terminology

In an effort to make these installation instructions as general as possible for installation in PPS-N and PECS, a few terms are used throughout the instructions with the intent that they be replaced with site-specific values.

Table 1: Terminology contains a list of those terms used only within this document as well as sample site-specific values for each term. Additionally, references to the DATUP server may be replaced with the site-specific name of the destination server at the installation site.

Table 1: Terminology

Term	Definition	Sample
Database Server	Machine on which Oracle is installed and runs	DATUP-N-DB
Deployment Machine	Virtual machine on which WebLogic is installed and runs	DATUP-N
Deployment Server	WebLogic managed server where DATUP is deployed	DATUP
Deployment Server Port	Port on which the Deployment Server is listening	REDACTED
Deployment Server's class path directory	Folder location on the Deployment Server where libraries on the class path are located (see WebLogic documentation for instructions on setting a WebLogic managed server's class path)	/u01/app/Oracle_Home/wlserver/server/lib
Java Database Connectivity (JDBC) Universal Resource Locator (URL)	URL to connect to Oracle database	jdbc:Oracle://DATUP-N-db:REDACTED/FDB45_DIF

3.2 Assumptions

The installation instructions found within this guide are intended to be performed on a clean installation of WebLogic 12.2.1.4.1 with a separate managed server to act as the Deployment Server. For details on completing the installation of the following items, please refer to each item's installation and configuration documentation supplied by Oracle.

For successful deployment of the DATUP software at a national site, the following assumptions must be met:

- The Deployment Server is configured and running.
- WebLogic is configured to run with the Java™ Standard Edition Development Kit, Version 1.8+.
- Access to the WebLogic console is by means of any valid administrative username and password.

- The proper Oracle 19c database driver libraries for the chosen deployment environment are present on the class path for the respective Deployment Servers.
- Red Hat Enterprise Linux 7.x operating system is properly installed.
- Domain Name Server (DNS) resolution is configured for the DATUP server.
- The installation instructions are followed in the order that the sections are presented within this Installation Guide.
- FDB45_DIF database is installed on the Database Server. Scripts located in GitHub in the [DATUP Product Repository](#).

3.3 Background Processes

Jobs that run in the background

The Quartz Scheduler runs in the background. It maintains the update schedule and fires after the configured timer has expired. Whether successful or unsuccessful, the process will execute again on the following day.

- PECS
 - Wednesdays
 - Full database export at 1:00 AM CT (5 minutes)
 - PECS Production RMAN backup at 2:00 AM CT (5 – 10 minutes)
 - Schedule PECS Comparison Report at 2:45 AM CT
- Cron Job
 - Lower environments: Daily at 4:00 AM CT
 - DEV (https://REDACTED.va.gov/PRE/home.go)
 - SQA (https://REDACTED.aac.va.gov/PRE/home.go)
 - Stage 2 (https://REDACTED.aac.va.gov/PRE/home.go)
 - Upper environments: Daily at 4:45 AM CT
 - Pre-Prod: https://REDACTED.aac.va.gov/PRE/home.go
 - Production: https://REDACTED.aac.va.gov/PRE/home.go
- DATUP Job Schedule
 - Lower environments: Daily at 4:30 AM CT for the following environments:
 - DEV (https://REDACTED.aac.va.gov/PRE/home.go)
 - SQA (https://REDACTED.aac.va.gov/PRE/home.go)
 - Stage 2 (https://REDACTED.aac.va.gov/PRE/home.go)
 - Upper environment: Daily at 4:30 AM CT
 - Pre-Prod: https://REDACTED.aac.va.gov/PRE/home.go
 - Production: https://REDACTED.aac.va.gov/PRE/home.go
- Scheduled Jobs:
 - FDB Add: (FDB45_DIF Add): Checks the FDB45_DIF for any new packaged drugs that have been added since the last time the job ran.
 - Daily at 6:00 AM CT

- FDB Update (FDB45_DIF Update): Checks the FDB45_DIF for any updated drugs that have been updated since the last time the job ran
 - Daily at 5:00 AM CT
- PPS-N

3.4 Database Installation and Configuration

The following sections describe the operating system and software for the DATUP database tier installation and configuration. Initially, install and configure the operating system software according to the manufacturer’s specifications. Then configure the Oracle databases as specified in the following sections for DATUP to function properly.

3.4.1 Oracle Database

The DATUP database is designed to be operating system independent. The only constraint is that Oracle 19c Enterprise Edition – Production must be properly installed and configured. The following sections describe the installation, features, user creation, and configuration for the Oracle database.

For successful deployment of the DATUP v4.0.1 application on the DATUP instance, the FDB45_DIF database must be installed.

3.4.2 Oracle Installation

A proper installation of the Oracle Relational Database Management System (RDBMS) is one in which the Oracle Universal Installer was used to perform an error-free installation and a general purpose instance was created. A properly configured Oracle RDBMS is one in which the associated Oracle application development and configuration tools, namely Structured Query Language (SQL)*Plus can be used to connect to the instance through Transparent Network Substrate alias.

3.4.3 Oracle Database Parameters

The following Oracle database parameters are recommended for the DATUP application:

- NLS language = American
- NLS territory = America
- Character set = AL32UTF8

3.4.4 Oracle Schema Creation for DATUP

Following are the steps needed to setup the DATUP schema on a national instance. Additionally, an example session is provided in **Oracle Installation.txt** detailing the commands issued, sequence performed, and expected results at each step. This file and the SQL scripts needed to create the DATUP schema are provided in the database/oracle_scripts.zip file. Table 2 provides a summary of each step that will be detailed below:

Table 2: Summary of Steps for Creating Oracle Schema

Step	Brief Description	Script File	User to Run Script File
1	Create tablespace and schema owner	1_CreateDatupSchema.sql	SYSTEM
2	Create schema objects	2_CreateDatupTables.sql	DATUP
3	Create application user	3_CreateDatupAppUser.sql	SYSTEM

Step 1 – Create Tablespace and Schema Owner

Prior to creation of the schema, logical, and physical environment structures must be setup for storage of the schema database objects: tablespaces and data files. For the DATUP schema one tablespace must be created, DATUP. The default scripted DATUP tablespace path is `/home/oracle/datup.dbf`, which may be changed in the `1_CreateDatupSchema.sql` script to match the installation environment prior to execution. This script also creates the schema owner DATUP as described below:

- DATUP – Owner of the DATUP schema. The default scripted password is “DATUP”, which may be changed in the `1_CreateDatupSchema.sql` script prior to installation. The script should be loaded as SYSTEM, or a user with account creation privileges.

Step by Step Commands

1. Open a text editor and open the `1_CreateDatupSchema.sql` script. Replace `/home/oracle` with the data file directory. The directory entered should already exist on the database server.
2. Login to the SQL client using a database account that has SYSDBA privileges (SYSTEM).
3. Execute the “`1_CreateDatupSchema.sql`” script.
4. Check for errors.

Step 2 – Create Schema Objects

Once the storage structures and schema have been created, execute the script `2_CreateDatupTables.sql` to create the DATUP tables, sequences, triggers, and indices. The script should be executed as DATUP, the schema owner.

Step by Step Commands

1. Login to the SQL client using the DATUP user account.
2. Execute the “`2_CreateDatupTables.sql`” script.
3. Check for errors.

Step 3 – Create Application User

Once the schema objects have been established, create the required DATUP application user by executing the script `3_CreateDatupAppUser.sql`.

- DATUP_APP_USER – Application user with read/update/delete access granted to the tables in the DATUP schema. The default scripted password is “DATUP_APP_USER”, which may be changed in the `3_CreateDatupAppUser.sql` script prior to installation. The script should be loaded as SYSTEM, or a user with account creation privileges. The chosen

DATUP_APP_USER password must match the password used to configure the JDBC data sources in Section 3.5.4.

Step by Step Commands

4. Login to the SQL client using a database account that has SYSDBA privileges (SYSTEM).
5. Execute the “3_CreateDatupAppUser.sql” script.
6. Check for errors.

3.4.5 Oracle Configuration and Data Load

The DATUP Oracle Database is the primary data repository for the DATUP application on the National DATUP instance. The database should be installed and configured appropriately for the DATUP operating environment.

The initial data load about the regionally managed MOCHA Servers must be loaded for the national DATUP instance to function. The data can be loaded with the SQL Loader scripts provided in the database/oracle_scripts.zip file. The Sites.ctl file describes the data and the Sites.csv file contains the comma-delimited Site records. The data should be loaded as DATUP_APP_USER. Execute the following steps to load the DATUP schema:

Step by Step Commands

1. Ensure the Sites.ctl file is in the current directory.
2. Type the following command from the Linux command prompt to invoke SQL Loader:
`$sqlldr datup_app_user/datup_app_user@ORACLE control=Sites.ctl`
3. Check for errors.

The DATUP database will need to be updated if a new MOCHA Server has been brought online since the original DATUP delivery date of March 17, 2010 and is not included in the Sites.csv spreadsheet. To update the Site table, login to the database as user DATUP_APP_USER. A new row must be added to the Site table for each MOCHA Server added since the system was first brought online. The site table contains three columns, a unique SITE_ID, a descriptive SITE_NAME, and the Veterans Integrated Service Network (VISN) VISN number. To update this table, execute a statement such as INSERT INTO SITE VALUES (999, 'Example Medical Center', 23) for each MOCHA Server brought online.

3.5 WebLogic Installation Instructions

The following sections detail the steps required to configure and deploy DATUP onto WebLogic at a national site.

3.5.1 Class Path

The national DATUP Enterprise Application Archive (EAR) file contains all the required libraries for the proper functioning of the application. If any other applications have been deployed to the Deployment Server, there may be conflicting third-party libraries in the Deployment Server's class path that will cause DATUP to operate differently than expected. If versions on the Deployment Server's class path differ from those defined in the DATUP Version Description Document (VDD) (Version 4.0.1, the preferred solution is to remove the library from the Deployment Server's class path. If that is not possible, replace the libraries with the DATUP versions.

3.5.2 WebLogic Server Startup Configuration

DATUP requires additional arguments added to the WebLogic Server's Server Start properties. This section details the steps to add the arguments to the server

1. Open and log into the WebLogic console, using an administrative user name and password. The WebLogic console is located at: `http://<Deployment Machine>: REDACTED /console` (for PECS) and `http://<Deployment Machine>: REDACTED /console` (for PPS-N)
2. Within the Domain Structure panel found in the left column of the WebLogic console, click on the Services > JDBC > Data Sources node. For reference, see Figure 2: Domain Structure.

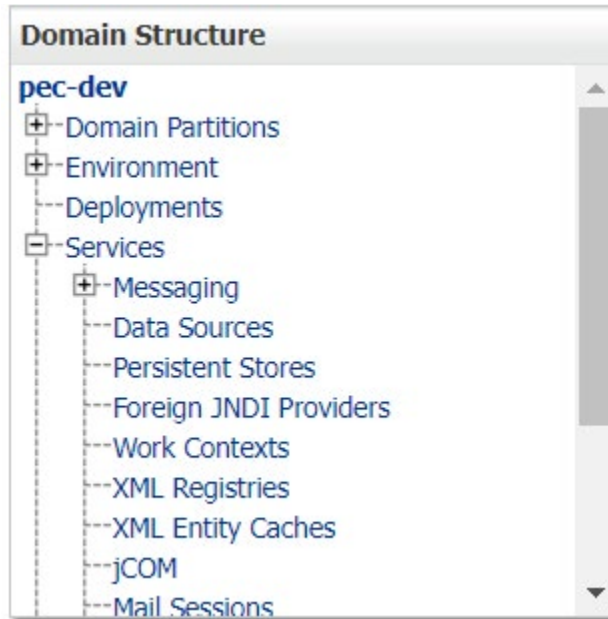


Figure 2: Domain Structure

3. Within the Change Center panel found in the left column of the WebLogic console, click **Lock & Edit**. For reference, see Figure 3: Change Center.

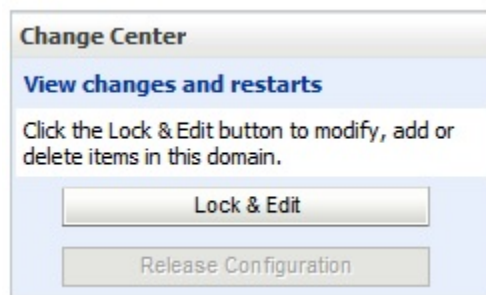


Figure 3: Change Center

4. Click on the server name corresponding to the deployment server in the Summary of Servers panel found in the right column of the WebLogic console. For reference, see Figure 4: Summary of Servers.

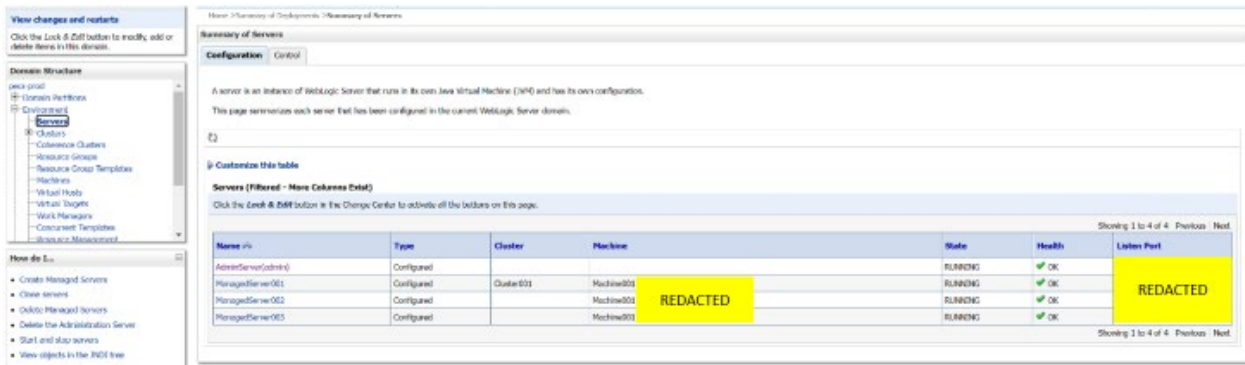


Figure 4: Summary of Servers

- WebLogic will now display the panel **Settings** for **Deployment Server** in the right column of the console, where configuration of the Deployment Server is set. For reference, see Figure 5: Settings for Deployment Server.

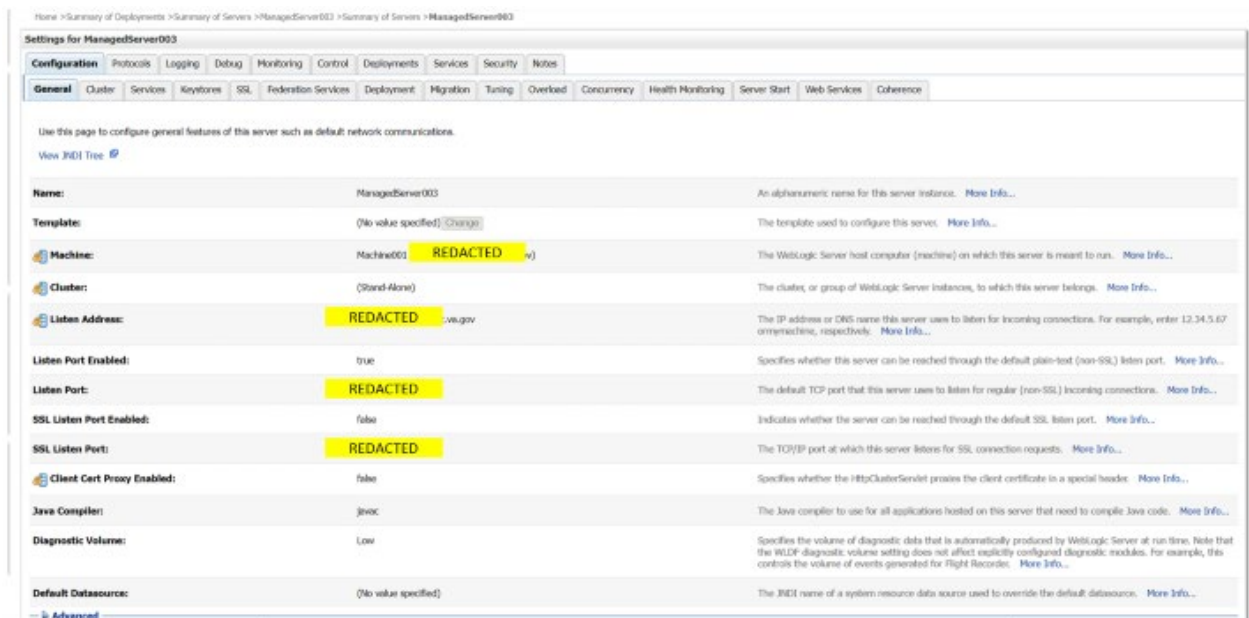


Figure 5: Settings for Deployment Server

- Click on the **Server Start** tab.

- WebLogic will now display the panel `Server Start` tab in the `Settings` for `Deployment Server` in the right column of the console, where configuration of the `Deployment Server` is set. For reference, see Figure 6: `Server Start Tab`.

Click the **Lock & Edit** button in the Change Center to modify the settings on this page.

Save

Node Manager is a WebLogic Server utility that you can use to start, suspend, shut down, and restart servers in normal or unexpected conditions. Use this page to configure the startup settings that Node Manager will use to start this server on a remote machine.

Java Home:	<input type="text"/>	The Java home directory (path on the machine running Node Manager) to use when starting this server. More Info...
Java Vendor:	<input type="text"/>	The Java Vendor value to use when starting this server. More Info...
BEA Home:	<input type="text"/>	The BEA home directory (path on the machine running Node Manager) to use when starting this server. More Info...
Root Directory:	<input type="text"/>	The directory that this server uses as its root directory. This directory must be on the computer that hosts Node Manager. If you do not specify a Root Directory value, the domain directory is used by default. More Info...
Class Path:	<input type="text" value="/u01/app/OracleHome/user_projects/domains/pps_dev2/datupconfig"/>	The classpath (path on the machine running Node Manager) to use when starting this server. More Info...
Arguments:	<input type="text" value="-server -Xms4g -Xmx4g -XX:PermSize=256m -XX:MaxPermSize=512m"/>	The arguments to use when starting this server. More Info...
Security Policy File:	<input type="text"/>	The security policy file (directory and filename on the machine running Node Manager) to use when starting this server. More Info...

Figure 6: Server Start Tab

- Insert the following text in the `Arguments` box:
`-server -Xms4g -Xmx4g -XX:PermSize=256m -XX:MaxPermSize=512m -`
`Dweblogic.nodemanager.ServiceEnabled=true -`
 Also add arguments (for reference, see the examples below, modify path per your server configuration) :-

For PPS-N:

`Dpeps.datup.configuration=:/U01/APP/ORACLEHOME/USER_PROJECTS/DOMAINS/PPS_DEV2/DATUPCONFIG/fdb_datup4_configuration.properties`

For PECS:

`Dpeps.datup.configuration=:/U01/APP/ORACLEHOME/USER_PROJECTS/DOMAINS/PECS_DEV2/DATUPCONFIG/fdb_datup4_configuration.properties`

- Click the **Save** Button
- Within the `Change Center` panel in the left column of the WebLogic console, click **Activate Changes**. For reference, see Figure 7: `Activate Changes`.

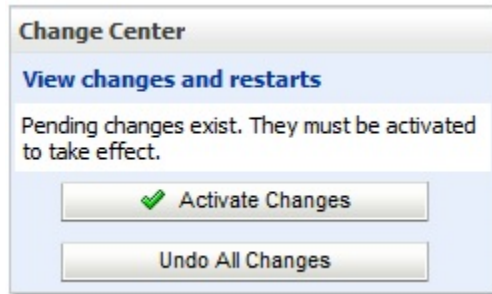


Figure 7: Activate Changes

3.5.3 National FDB45_DIF Data Source Configuration

DATUP uses two database connections by means of a data source to FDB45_DIF in order to perform FDB updates. Complete the following steps to create a new connection pool and data source for FDB45_DIF.

1. Open and log into the WebLogic console, using an administrative user name and password. The WebLogic console is located at: `http://<Deployment Machine>:REDACTED/console` (for PECS) and `http://<Deployment Machine>:REDACTED/console` (for PPS-N)
2. Within the Domain Structure panel found in the left column of the WebLogic console, click on the Services > JDBC > Data Sources node. For reference, see Figure 8: Domain Structure.

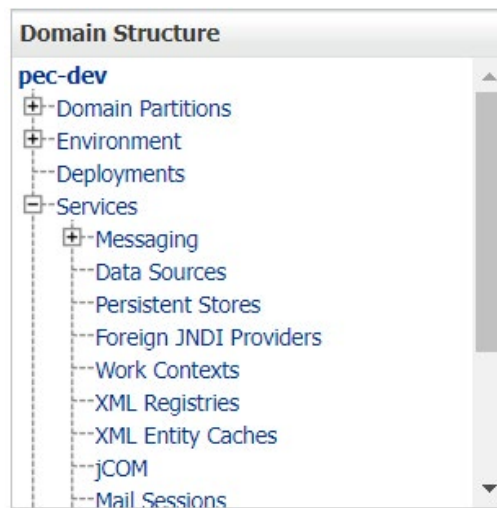


Figure 8: Domain Structure

3. Within the Change Center panel found in the left column of the WebLogic console, click **Lock & Edit**. For reference, see Figure 9: Change Center.

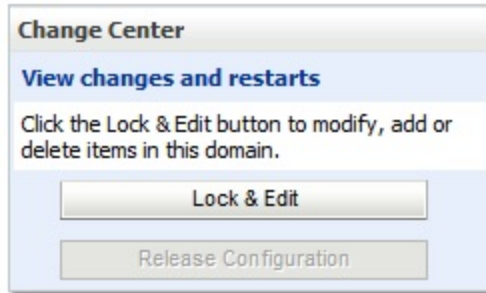


Figure 9: Change Center

4. Click **New - Generic Data Source** found in the Summary of JDBC Data Sources panel found in the right column of the WebLogic console. For reference, see Figure 10: Summary of JDBC Data Sources

Name	Type	JNDI Name	Targets
CTF8DataSource	Generic	jbo/CTF8DataSource	ManagedServer001
CTF8DataSource45	Generic	jbo/CTF8DataSource45	ManagedServer001
CT59mgDataSource	Generic	jbo/CT59mgDataSource	ManagedServer001
DATUP	Generic	datasource/DATUP	ManagedServer002
F0B45-DIF	Generic	datasource/F0B45-DIF	ManagedServer002

Figure 10: Summary of JDBC Data Sources

5. WebLogic will now display the panel **Create a New JDBC Data Source** in the right column of the console, where details of the new data source are set. For reference, see Figure 11.


Create a New JDBC Data Source

Back Next Finish Cancel


JDBC Data Source Properties

The following properties will be used to identify your new JDBC data source.
 * Indicates required fields

What would you like to name your new JDBC data source?

 * **Name:**

What JNDI name would you like to assign to your new JDBC Data Source?

 **JNDI Name:**

What database type would you like to select?

Database Type:

Back Next Finish Cancel

Figure 11: JDBC Data Source Properties

6. For the Name, type FDB45_DIF.
7. For the JNDI Name, type datasource/FDB45_DIF.
8. For the Database Type, select Oracle.
9. Click **Next**.
10. For the Database Driver, verify that Oracle's Driver (Thin) for Instance Connections; Versions:9.0.1 and later is selected.
11. Click **Next**.
12. WebLogic will now display the panel Transaction Options in the right column of the console, where the transaction attributes for this data source are set. For reference, see Figure 12: Transaction Options.

Create a New JDBC Data Source

Back Next Finish Cancel

Transaction Options

You have selected non-XA JDBC driver to create database connection in your new data source.

Does this data source support global transactions? If yes, please choose the transaction protocol for this data source.

Supports Global Transactions

Select this option if you want to enable non-XA JDBC connections from the data source to participate in global transactions using the *Logging Last Resource* (LLR) transaction optimization. Recommended in place of Emulate Two-Phase Commit.

Logging Last Resource

Select this option if you want to enable non-XA JDBC connections from the data source to emulate participation in global transactions using JTA. Select this option only if your application can tolerate heuristic conditions.

Emulate Two-Phase Commit

Select this option if you want to enable non-XA JDBC connections from the data source to participate in global transactions using the one-phase commit transaction processing. With this option, no other resources can participate in the global transaction.

One-Phase Commit

Back Next Finish Cancel

Figure 12: Transaction Options

13. Select the **Emulate Two-Phase Commit** radio button.
14. Select **Next**.
15. WebLogic will now display the panel `Connection Properties` in the right column of the console, where the connection pool attributes are set. For reference, see Figure 13: `Connection Properties`.

Create a New JDBC Data Source

Back | Next | Finish | Cancel

JDBC Data Source Properties

The following properties will be used to identify your new JDBC data source.
 * Indicates required fields

What would you like to name your new JDBC data source?

Name:

What scope do you want to create your data source in ?

Scope:

What JNDI name would you like to assign to your new JDBC Data Source?

JNDI Name:

What database type would you like to select?

Database Type:

Back | Next | Finish | Cancel

Figure 13: Connection Properties

16. For Database Name, type the name of the Oracle database to which DATUP will connect. For example, FDB_DATA.
17. For Host Name, type the name of the machine on which Oracle is running. For example, REDACTED.va.gov
18. For Port, type the port on which Oracle is listening. For example, PECS: REDACTED and PPS-N: REDACTED

19. For Database User Name, type the user to connect to the FDB database. For example, FDB45_DIF. The user entered should be the same as configured in Section 3.4.5
20. For Password and Confirm Password, type the password for the user given previously.
21. Click **Next**.
22. WebLogic will now display the panel Test Database Connection in the right column of the console, where the new data source can be tested. For reference, Figure 14. Test Database Connection

Password:

Confirm Password:

What are the properties to pass to the JDBC driver when creating database connections?

Properties:

The set of driver properties whose values are derived at runtime from the named system property.

System Properties:

What table name or SQL statement would you like to use to test database connections?

Test Table Name:

Figure 14: Test Database Connection

23. Leave all values as set by default, with the exception of Test Table Name. For this attribute, type fdb_version.

24. Click **Next**.
25. WebLogic will now display the panel **Select Targets** in the right column of the console, where the target server is selected for the new data source. For reference, see Figure 16. Select Targets.

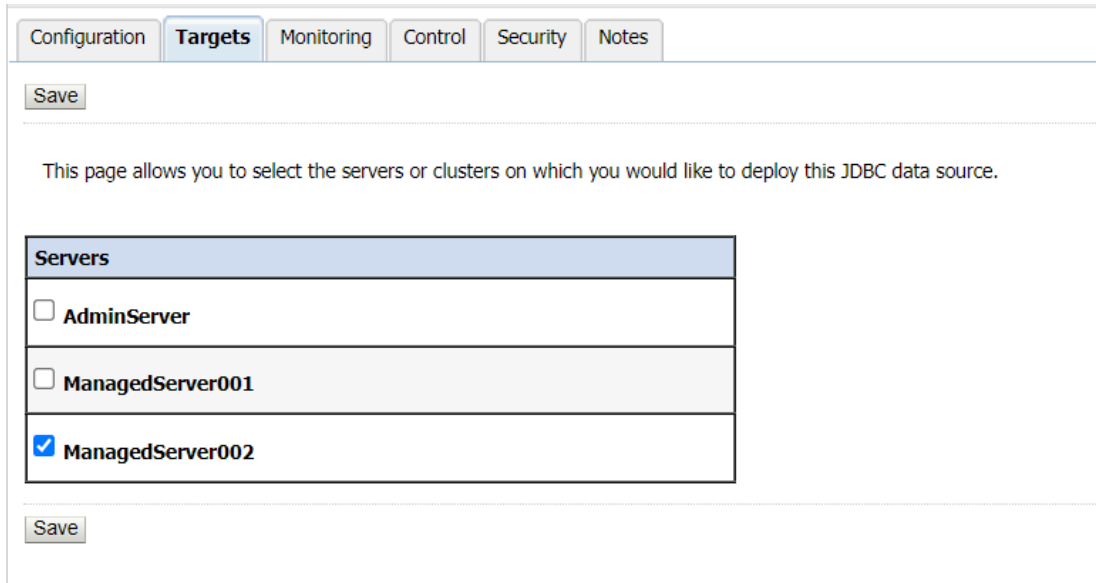


Figure 15: Select Targets

26. Select the Deployment Server as the target. For example, PECS: MANAGEDSERVER002 and PPS-N: MANAGEDSERVER003
27. Click **Finish**.
28. Click **Activate Changes**.
29. WebLogic will now display the panel **Summary of JDBC Data Sources** in the right column of the console, where the newly created data source is displayed. For reference, see Figure 16.

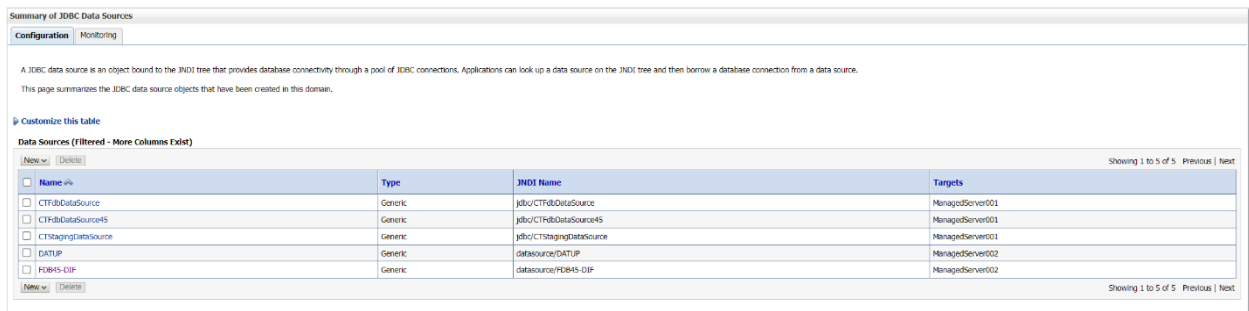


Figure 16: Summary of JDBC Data Sources

3.5.4 National JDBC DATUP Data Source Configuration

DATUP uses two database connections by means of a data source to perform the automated DATUP update process. Complete the following steps to create a new connection pool and data source for MedKnowledge Framework.

1. Open and log into the WebLogic console, using an administrative user name and password. The WebLogic console is located at: `http://<Deployment Machine>:REDACTED/console` and `http://<Deployment Machine>:REDACTED/console` (for PPS-N)
2. Within the Domain Structure panel found in the left column of the WebLogic console, click on the Services > JDBC > Data Sources node. For reference, see Figure 17.

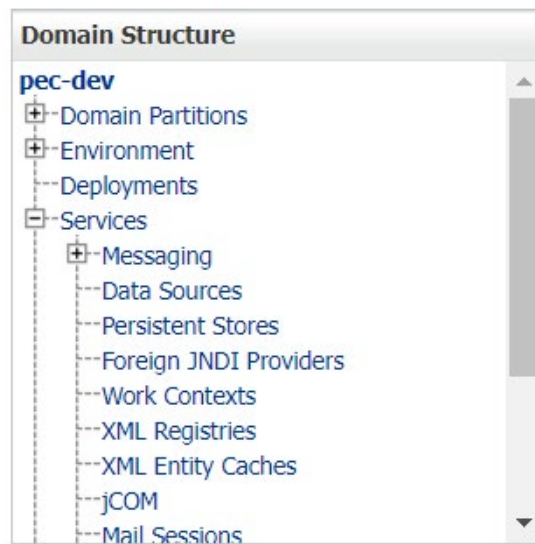


Figure 17: Domain Structure

3. Within the Change Center panel found in the left column of the WebLogic console, click **Lock & Edit**. For reference, see Figure 18.

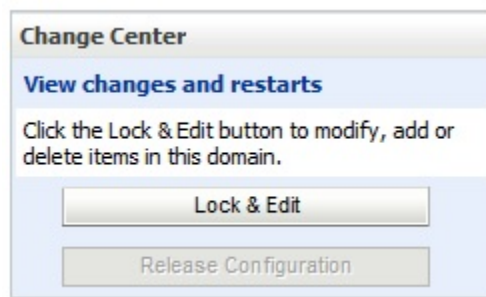


Figure 18: Change Center

4. Click **New - Generic Datasource** found in the Summary of JDBC Data Sources panel found in the right column of the WebLogic console. For reference, see Figure 19.

Summary of JDBC Data Sources

Configuration | Monitoring

A JDBC data source is an object bound to the JNDI tree that provides database connectivity through a pool of JDBC connections. Applications can look up a data source on the JNDI tree and then borrow a database connection from a data source. This page summarizes the JDBC data source objects that have been created in this domain.

Customize this table

Data Sources (Filtered - More Columns Exist)

Name	Type	JNDI Name	Targets
<input type="checkbox"/> CTfobDataSource	Generic	jdb/CTfobDataSource	ManagedServer01
<input type="checkbox"/> CTfobDataSource45	Generic	jdb/CTfobDataSource45	ManagedServer01
<input type="checkbox"/> CT3a9ngDataSource	Generic	jdb/CT3a9ngDataSource	ManagedServer01
<input type="checkbox"/> DATUP	Generic	datasource/DATUP	ManagedServer02
<input type="checkbox"/> F0B45-DJP	Generic	datasource/F0B45-DJP	ManagedServer02

Figure 19: Summary of JDBC Data Sources

- WebLogic will now display the panel Create a New JDBC Data Source in the right column of the console, where details of the new data source are set. For reference, see Figure 20.

Create a New JDBC Data Source

Back | Next | Finish | Cancel

JDBC Data Source Properties

The following properties will be used to identify your new JDBC data source.

* Indicates required fields

What would you like to name your new JDBC data source?

Name:

What JNDI name would you like to assign to your new JDBC Data Source?

JNDI Name:

What database type would you like to select?

Database Type:

Back | Next | Finish | Cancel

Figure 20: JDBC Data Source Properties

- For the Name, type DATUP.
- For the JNDI Name, type datasource/DATUP.
- For the Database Type, select Oracle.

9. Click **Next**.
10. For the Database Driver, verify that Oracle's Driver (Thin) for Instance connections; Versions: 9.0.1 and later is selected.
11. Click **Next**.
12. WebLogic will now display the panel Transaction Options in the right column of the console, where the transaction attributes for this data source are set. For reference, see Figure 21.

Create a New JDBC Data Source

Back Next Finish Cancel

Transaction Options

You have selected non-XA JDBC driver to create database connection in your new data source.

Does this data source support global transactions? If yes, please choose the transaction protocol for this data source.

Supports Global Transactions

Select this option if you want to enable non-XA JDBC connections from the data source to participate in global transactions using the *Logging Last Resource* (LLR) transaction optimization. Recommended in place of Emulate Two-Phase Commit.

Logging Last Resource

Select this option if you want to enable non-XA JDBC connections from the data source to emulate participation in global transactions using JTA. Select this option only if your application can tolerate heuristic conditions.

Emulate Two-Phase Commit

Select this option if you want to enable non-XA JDBC connections from the data source to participate in global transactions using the one-phase commit transaction processing. With this option, no other resources can participate in the global transaction.

One-Phase Commit

Back Next Finish Cancel

Figure 21: Transaction Options

13. Select the **Emulate Two-Phase Commit** radio button
14. Click **Next**.

15. WebLogic will now display the panel `Connection Properties` in the right column of the console, where the connection pool attributes are set. For reference, see Figure 22.

The screenshot shows a dialog box titled "Create a New JDBC Data Source". At the top, there are four buttons: "Back", "Next", "Finish", and "Cancel". Below this is a section titled "Connection Properties" with the subtitle "Define Connection Properties.". The main area contains several questions and corresponding input fields:

- Question: "What is the name of the database you would like to connect to?"
Field: "Database Name:" with the value "DATUP".
- Question: "What is the name or IP address of the database server?"
Field: "Host Name:" with the value "vausappec201.aac.va.gov".
- Question: "What is the port on the database server used to connect to the database?"
Field: "Port:" with the value "8012".
- Question: "What database account user name do you want to use to create database connections?"
Field: "Database User Name:" with the value "datup".
- Question: "What is the database account password to use to create database connections?"
Field: "Password:" with a masked password of seven dots.
- Field: "Confirm Password:" with a masked password of seven dots.

At the bottom of the dialog, there are four buttons: "Back", "Next", "Finish", and "Cancel".

Figure 22: Connection Properties

16. For `Database Name`, type the name of the Oracle database to which DATUP will connect. For example, DATUP.
17. For `Host Name`, type the name of the machine on which Oracle is running. For example, REDACTED.va.gov.
18. For `Port`, type the port on which Oracle is listening. For example, REDACTED
19. For `Database User Name`, type the user to connect to the FDB database. For example, DATUP. The user entered should be the same as configured in Section 3.4.4
20. For `Password` and `Confirm Password`, type the password for the user given previously.
21. Click **Next**.

22. WebLogic will now display the panel `Test Database Connection` in the right column of the console, where the new data source can be tested. For reference, see Figure 23.

The screenshot shows the 'Create a New JDBC Data Source' wizard in the 'Test Database Connection' step. The interface includes a title bar, navigation buttons (Test Configuration, Back, Next, Finish, Cancel), and several sections for configuration:

- Test Database Connection:** A section with a title and a description: 'Test the database availability and the connection properties you provided.'
- Driver Class Name:** A text field containing 'oracle.jdbc.OracleDriver'. Above it is the question: 'What is the full package name of JDBC driver class used to create database connections in the connection pool?' with a note: '(Note that this driver class must be in the classpath of any server to which it is deployed.)'
- URL:** A text field containing 'jdbc:oracle:thin:@vaausd'. Above it is the question: 'What is the URL of the database to connect to? The format of the URL varies by JDBC driver.'
- Database User Name:** A text field containing 'datup'. Above it is the question: 'What database account user name do you want to use to create database connections?'
- Password:** A password field with masked characters. Above it is the question: 'What is the database account password to use to create database connections?' with a note: '(Note: for secure password management, enter the password in the Password field instead of the Properties field below)'. Below it is a 'Confirm Password:' field, also masked.
- Properties:** A text area containing 'user=datup'. Above it is the question: 'What are the properties to pass to the JDBC driver when creating database connections?'
- System Properties:** An empty text field. Above it is the question: 'The set of driver properties whose values are derived at runtime from the named system property.'
- Test Table Name:** A text area containing 'SQL SELECT 1 FROM DUAL'. Above it is the question: 'What table name or SQL statement would you like to use to test database connections?'

At the bottom, there are navigation buttons: Test Configuration, Back, Next, Finish, and Cancel.

Figure 23: Test Database Connection

23. Leave all values as set by default.

24. Click **Next**.

25. WebLogic will now display the panel `Select Targets` in the right column of the console, where the target server is selected for the new data source. For reference, see Figure 24: `Select Targets` .

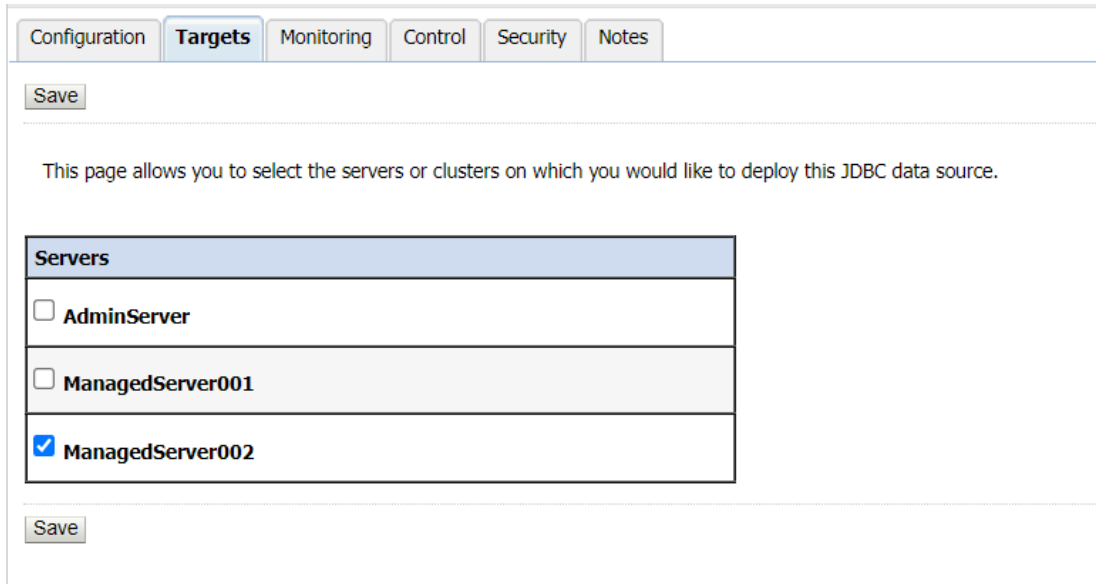


Figure 24: Select Targets

26. Select the Deployment Server as the target. For example, DATUP.
27. Click **Finish**.
28. WebLogic will now display the panel Summary of JDBC Data Sources in the right column of the console, where the newly created data source is displayed. For reference, see Figure 25.

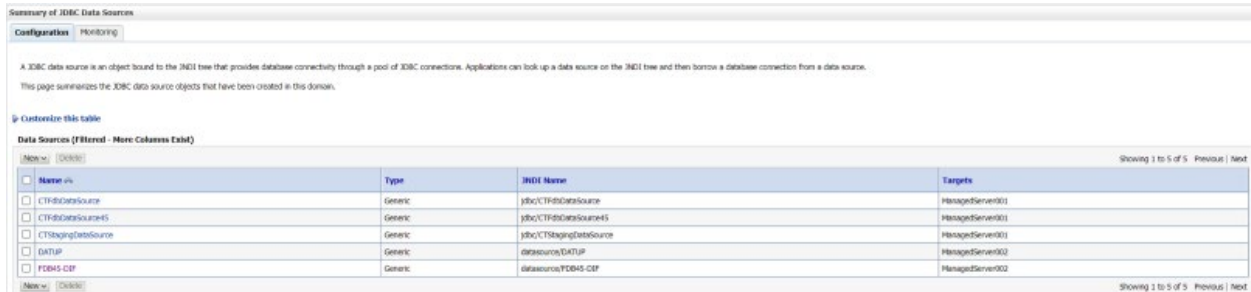


Figure 25: Summary of JDBC Data Sources

28. Within the Change Center panel in the left column of the WebLogic console, click **Activate Changes**. For reference, see Figure 27.

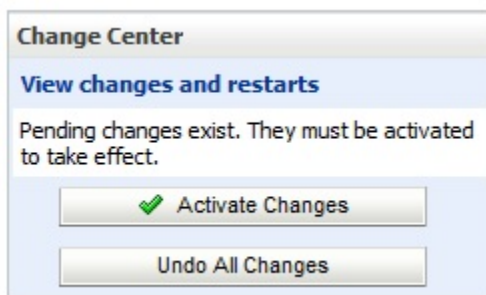


Figure 26: Activate Changes

3.5.5 Log4j2

DATUP uses Log4j2 to provide debug and error logs. Although the application will function without Log4j2 installed, using it can be helpful to troubleshoot potential issues. Because DATUP can operate without Log4j2 configured, all instructions within this section are only required if debugging deployed code.

To install Log4j2, the `log4j2.xml` must be edited to include the DATUP appenders and loggers.

1. Create the log folder defined in the Deployment Server arguments. For example, `/u01/app/Oracle_Home/user_projects/domains/pps/DATUPLogs`. Without this folder, Log4j2 will not be able to create the log files specified in the DATUP configuration.
2. Create the `log4j2.xml` file that is located in the path specified in the Deployment Server arguments.
3. Configure the `log4j2.xml` using Appendix C: `log4j2` as a reference.
4. Refer `log4j2.xml` at `/u01/app/OracleHome/user_projects/domains/pps_dev2/datupconfig`
5. Restart the Deployment Server to load the Log4j2 configuration.

3.6 DATUP Configuration Properties

In order to use the DATUP component, a configuration file must be configured for each WebLogic deployment. The location of this file was configured in Section 3.5.2. This file is self-documenting and contains the list of configurable properties for DATUP. See Appendix A for a sample version and notes on new parameters.

3.6.1 DATUP Cleanup Script

DATUP creates temporary zip files during the update process. Create a cron job to remove `/tmp/datup*.zip` files once a day.

3.6.2 Deployment

The following steps detail the deployment of the DATUP component. Prior to completing these steps, the WebLogic class path, the WebLogic database configurations, and the Deployment Server must be restarted to load the changed configuration. Please refer to Sections 3.5.1 and 3.5.3 for instructions concerning these configuration items. Complete the following steps to deploy DATUP:

1. Open and log into the WebLogic console. This is located at: `http://<Deployment Machine>:REDACTED /console` and `http://<Deployment Machine>:REDACTED /console` (for PPS-N)
2. Within the Domain Structure panel in the left column of the WebLogic console, click the Deployments node. For reference, see Figure 27.

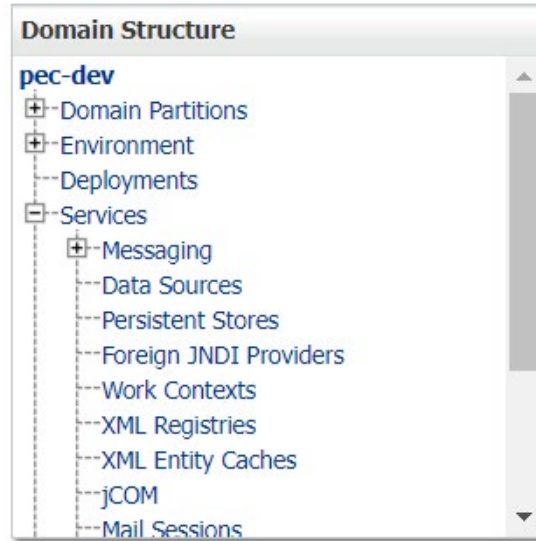


Figure 27: Domain Structure

3. Within the Change Center panel in the left column of the WebLogic console, click **Lock & Edit**. For reference, see Figure 28.

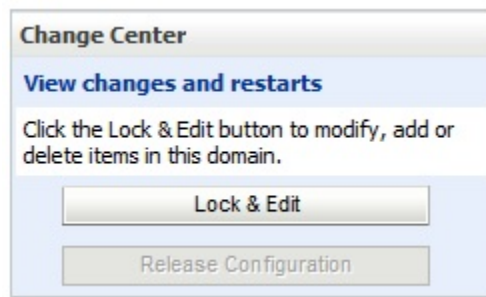


Figure 28: Change Center

4. Click **Install** found in the Deployments panel in the right column of the WebLogic console. For reference, see Figure 29.

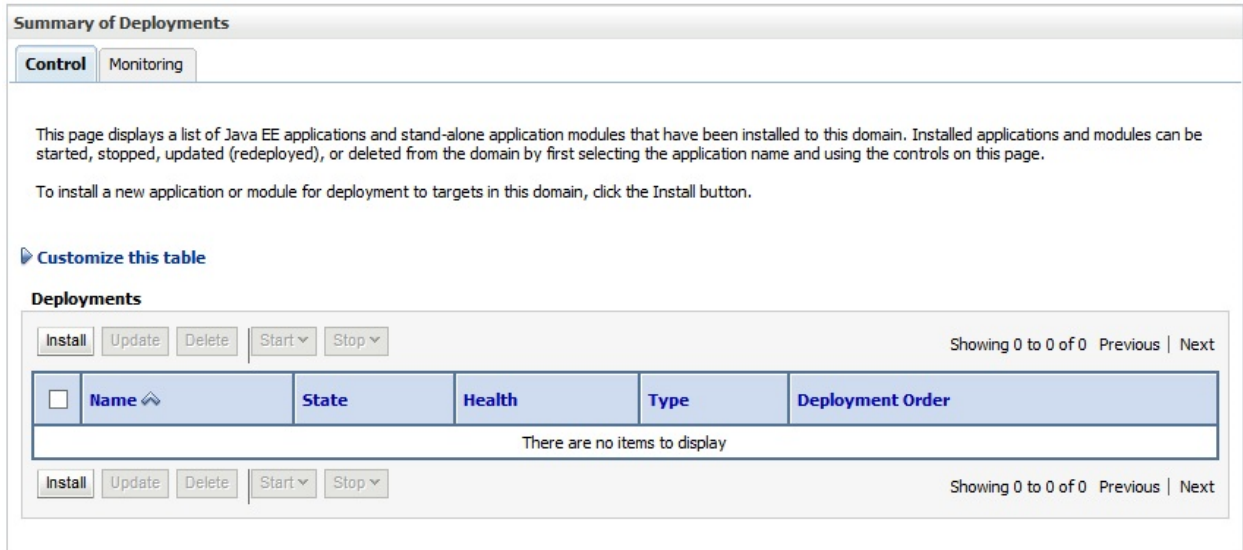


Figure 29: Deployments

5. WebLogic will now display the panel **Install Application Assistant** in the right column of the console, where the location of the DATUP deployment will be found. For
6. Navigate to the deployment file location using the links and file structure displayed within the **Location** panel within the **Install Application Assistant** in the right column of the console, and select the DATUP deployment, select the `datup-national-4.0.0.0001.ear` file. For reference, see Figure 30.



Figure 30: Locate Deployment to Install and Prepare for Deployment

- Once the DATUP deployment is located and selected, click **Next**.
- WebLogic will now display the panel Choose targeting style within the Install Application Assistant in the right column of the console. Leave the default value selected, Install this deployment as an application, and click **Next**. For reference, see Figure 31.

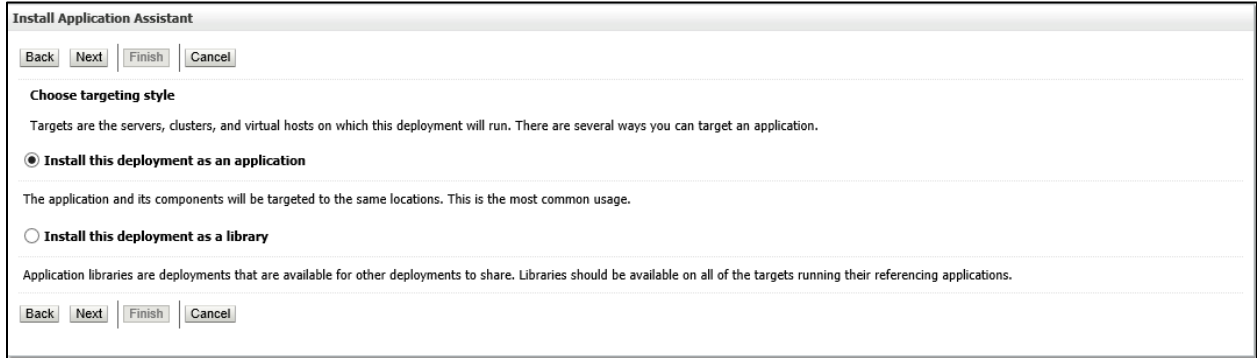


Figure 31: Choose Targeting Style

- Within the Install Application Assistant in the right column of the console, WebLogic will now display the panel Select deployment targets, where the Deployment Server will be selected as the target in the next step. For reference, see Figure 32.



Figure 32: Select Deployment Targets

10. For the Target, select the Deployment Server. For example, `datup-national-4.0.0.17-1befbf7`
11. Click **Next**.
12. Within the Install Application Assistant, WebLogic will now display the panel **Optional Settings** in the right column of the console, where the name of the deployment and the copy behavior are chosen. For reference, see Figure 33.

The screenshot shows the 'Install Application Assistant' window with the following content:

- Buttons: Back, Next, Finish, Cancel
- Section: **Optional Settings**
- Text: You can modify these settings or accept the defaults. * Indicates required fields
- Section: **General**
- Text: What do you want to name this deployment?
- Text: * Name: [DATUP]
- Section: **Security**
- Text: What security model do you want to use with this application?
- Radio buttons:
 - DD Only: Use only roles and policies that are defined in the deployment descriptors.**
 - Custom Roles: Use roles that are defined in the Administration Console; use policies that are defined in the deployment descriptor.
 - Custom Roles and Policies: Use only roles and policies that are defined in the Administration Console.
 - Advanced: Use a custom model that you have configured on the realm's configuration page.
- Section: **Source Accessibility**
- Text: How should the source files be made accessible?
- Radio buttons:
 - Use the defaults defined by the deployment's targets
 - Recommended selection.

Figure 33: Optional Settings

13. Enter the Name for the deployment. For example, `DATUP`.
14. Verify that the following default option for Security is selected:
DD Only: Use only roles and policies that are defined in the deployment descriptors.

15. Verify that the following default option for Source accessibility is selected:
Use the defaults defined by the deployment's targets.
16. Click **Next**.
17. Within the Install Application Assistant in the right column of the console WebLogic will now display the panel Review your choices and click Finish, which summarizes the steps completed above. For reference, see Figure 34.

Install Application Assistant

Back Next Finish Cancel

Review your choices and click Finish

Click Finish to complete the deployment. This may take a few moments to complete.

Additional Configuration

In order to work successfully, this application may require additional configuration. Do you want to review this application's configuration after completing this assistant?

Yes, take me to the deployment's configuration screen.

No, I will review the configuration later.

Summary

Deployment: /u01/app/oracle/user_projects/domains/pps-dev/servers/AdminServer/upload/datup-national-4.0.0.0001.ear/app/datup-national-4.0.0.0001.ear

Name: DATUP

Staging Mode: Use the defaults defined by the chosen targets

Plan Staging Mode: Use the same accessibility as the application

Security Model: DDOnly: Use only roles and policies that are defined in the deployment descriptors.

Scope: Global

Target Summary

Components	Targets
datup-national-4.0.0.0001.ear	National_DATUP

Back Next Finish Cancel

Figure 34: Review Your Choices and Click Finish

18. Verify that the values match those entered in Steps 1 through 17 and click **Finish**.

1. WebLogic will now display the panel `Settings` for `DATUP`, in the right column of the console, where the values previously entered are available as well as a setting to change the deployment order. For reference, see Figure 35.

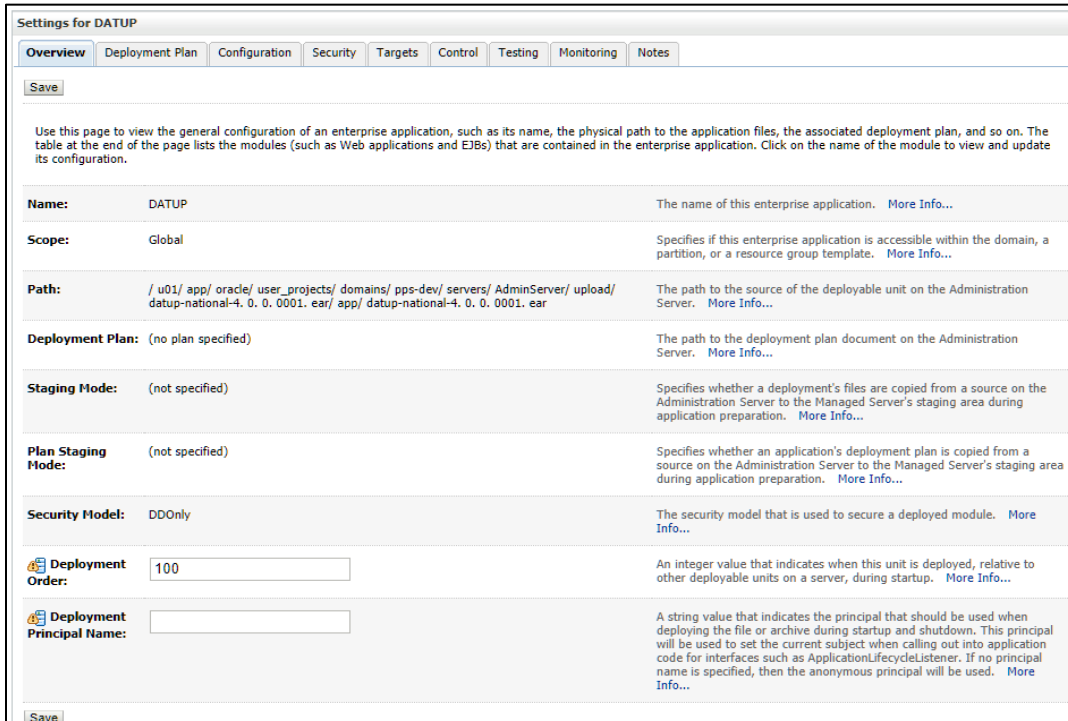


Figure 35: Settings for DATUP

2. Leave all the values as defaulted by WebLogic and click **Save**.
3. Within the `Change Center` panel in the left column of the WebLogic console, click **Activate Changes**. For reference, see Figure 36.

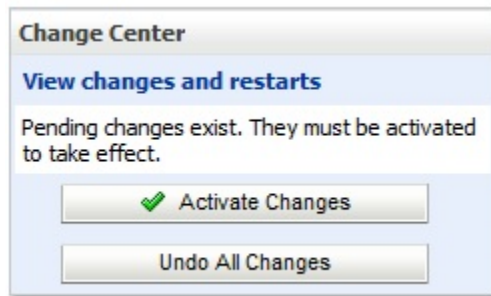


Figure 36: Activate Changes

4. Within the `Domain Structure` panel in the left column of the WebLogic console, click the `PRE > Deployments` node. For reference, see Figure 37.

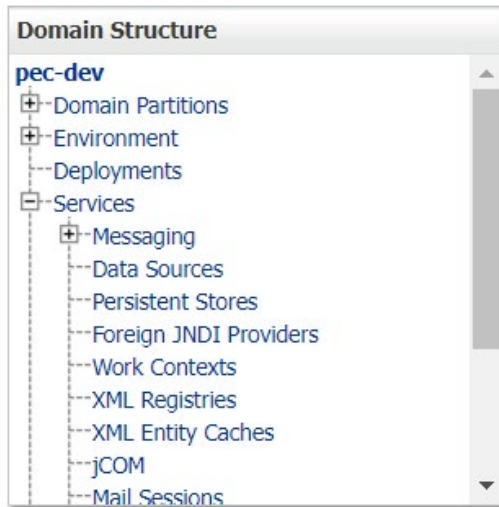


Figure 37: Domain Structure

- WebLogic will now display the panel Summary of Deployments in the right column of the console, where all deployments for the WebLogic domain are listed. For reference, see Figure 38.

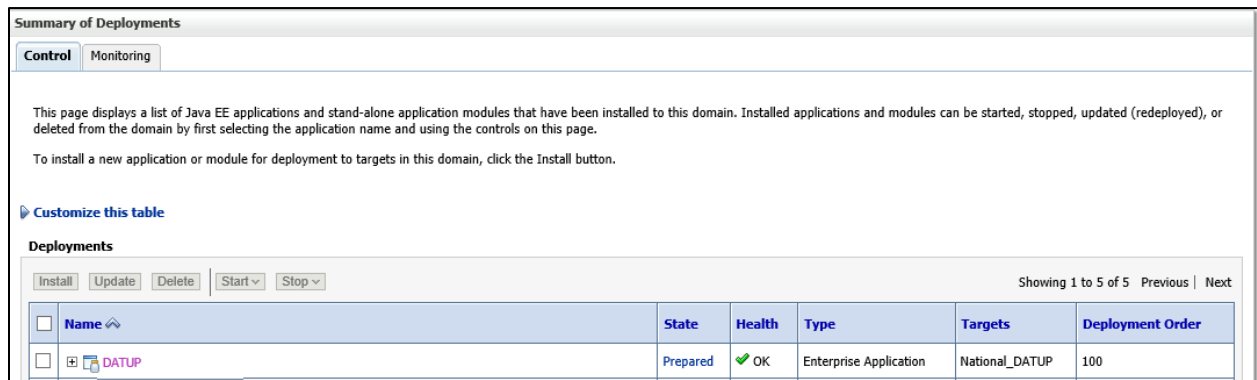


Figure 38: Summary of Deployments

- Select the previously deployed DATUP deployment, click Start, and then select Servicing all requests from the drop-down list box.
- WebLogic will now display the panel Start Application Assistant in the right column of the console for confirmation to start servicing requests. For reference, see Figure 39.

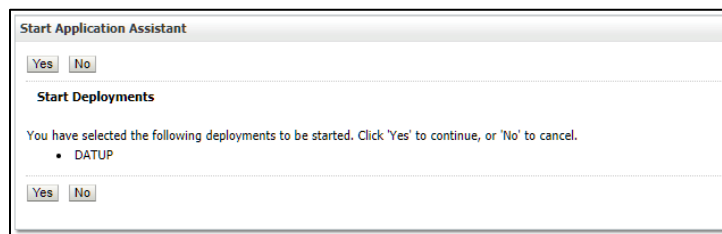


Figure 39: Start Application Assistant

8. Click **Yes** in the Start Application Assistant panel in the right column of the WebLogic console.
9. WebLogic now returns to the Summary of Deployments panel in the right column of the console. For reference, see Figure 40.

Summary of Deployments

Control | Monitoring

This page displays a list of Java EE applications and stand-alone application modules that have been installed to this domain. Installed applications and modules can be started, stopped, updated (redeployed), or deleted from the domain by first selecting the application name and using the controls on this page.

To install a new application or module for deployment to targets in this domain, click the Install button.

[Customize this table](#)

Deployments

Install | Update | Delete | Start ▾ | Stop ▾ Showing 1 to 5 of 5 Previous | Next

<input type="checkbox"/>	Name ↕	State	Health	Type	Targets	Deployment Order
<input type="checkbox"/>	DATUP	Active	✔ OK	Enterprise Application	National_DATUP	100

Figure 40: Summary of Deployments – DATUP Deployment Active

10. Verify that the State of the DATUP deployment is Active.

(This page included for two-sided copying.)

4 Upgrade Installation Instructions

The following instructions detail the steps required to perform an installation of a release for the DATUP software when an existing release is already deployed at a national site. These steps assume a fresh installation has been completed, following the steps in Section 3.

4.1 Uninstall Previous Release

The following steps detail the un-installation of the DATUP application. Prior to completing these steps, the DATUP application must have been deployed following the steps in Section 3. Complete the following steps to un-deploy DATUP:

1. Open and log into the WebLogic console. This is located at: `http://<Deployment Machine>:REDACTED /console` and `http://<Deployment Machine>:REDACTED /console` (for PPS-N)
2. Within the Domain Structure panel in the left column of the WebLogic console, click the Deployments node. For reference, see .Figure 41: Domain Structure

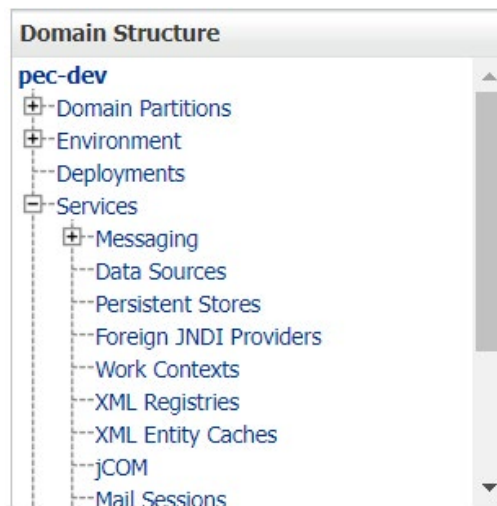


Figure 41: Domain Structure

3. Within the Change Center panel in the left column of the WebLogic console, click Lock & Edit. For reference, see Figure 42: Change Center.

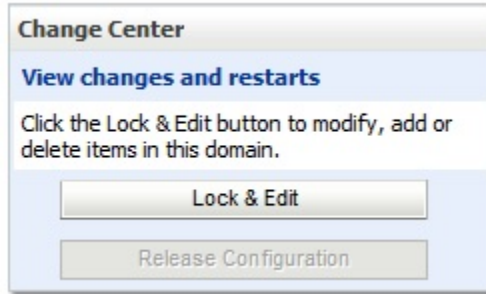


Figure 42: Change Center

- WebLogic will now display the panel Summary of Deployments in the right column of the console, where all deployments for the WebLogic domain are listed. For reference, see .Figure 43: Summary of Deployments – Stopping DATUP

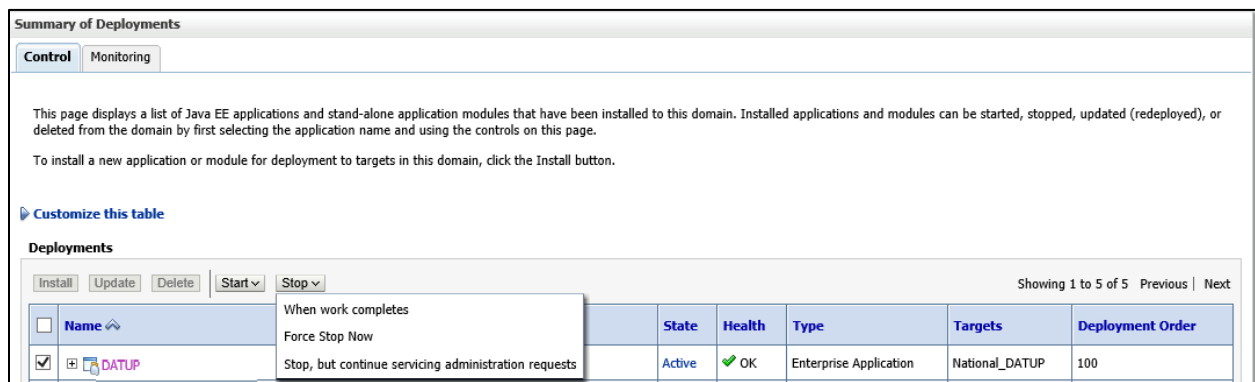


Figure 43: Summary of Deployments – Stopping DATUP

- Select the previously deployed DATUP deployment, click **Stop**, and then select **Force Stop Now** from the drop-down list box.
- WebLogic will now display the panel Force Stop Application Assistant in the right column of the console for confirmation to start servicing requests. For reference, see Figure 44: Force Stop Application Assistant.

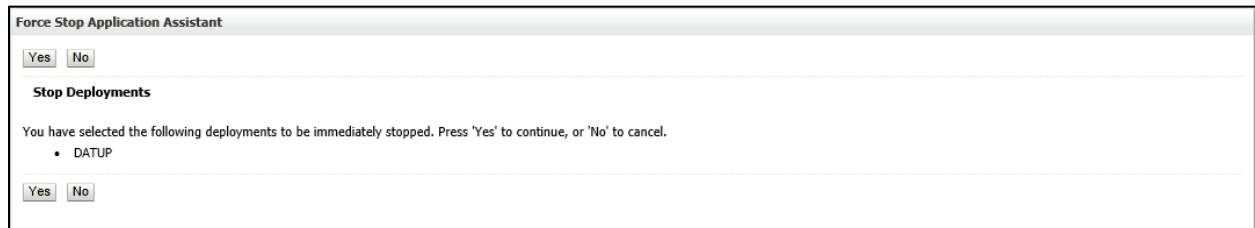


Figure 44: Force Stop Application Assistant

- Select **Yes** in the Force Stop Application Assistant panel in the right column of the WebLogic console.
- WebLogic now returns to the Summary of Deployments panel in the right column of the console. For reference, see Figure 45: Summary of Deployments – DATUP Deployment Prepared.

Summary of Deployments

Control Monitoring

This page displays a list of Java EE applications and stand-alone application modules that have been installed to this domain. Installed applications and modules can be started, stopped, updated (redeployed), or deleted from the domain by first selecting the application name and using the controls on this page.

To install a new application or module for deployment to targets in this domain, click the Install button.

[Customize this table](#)

Deployments

Install Update Delete Start Stop Showing 1 to 5 of 5 Previous Next

<input type="checkbox"/>	Name	State	Health	Type	Targets	Deployment Order
<input type="checkbox"/>	DATUP	Prepared	OK	Enterprise Application	National_DATUP	100

Figure 45: Summary of Deployments – DATUP Deployment Prepared

9. Verify that the State of the DATUP deployment is Prepared.
10. Select the previously deployed DATUP deployment, and then select **Delete**.
11. WebLogic will now display the panel Delete Application Assistant in the right column of the console for confirmation to start servicing requests. For reference, see Figure 46: Delete Application Assistant

Delete Application Assistant

Yes No

Delete Deployments

You have selected the following deployments to be removed from this domain configuration. Click 'Yes' to continue, or 'No' to cancel.

- DATUP

Yes No

Figure 46: Delete Application Assistant

12. Select **Yes** in the Delete Application Assistant panel in the right column of the WebLogic console.
13. WebLogic now returns to the Summary of Deployments panel in the right column of the console. For reference, see .Figure 47: Summary of Deployments – DATUP Deployment Deleted.

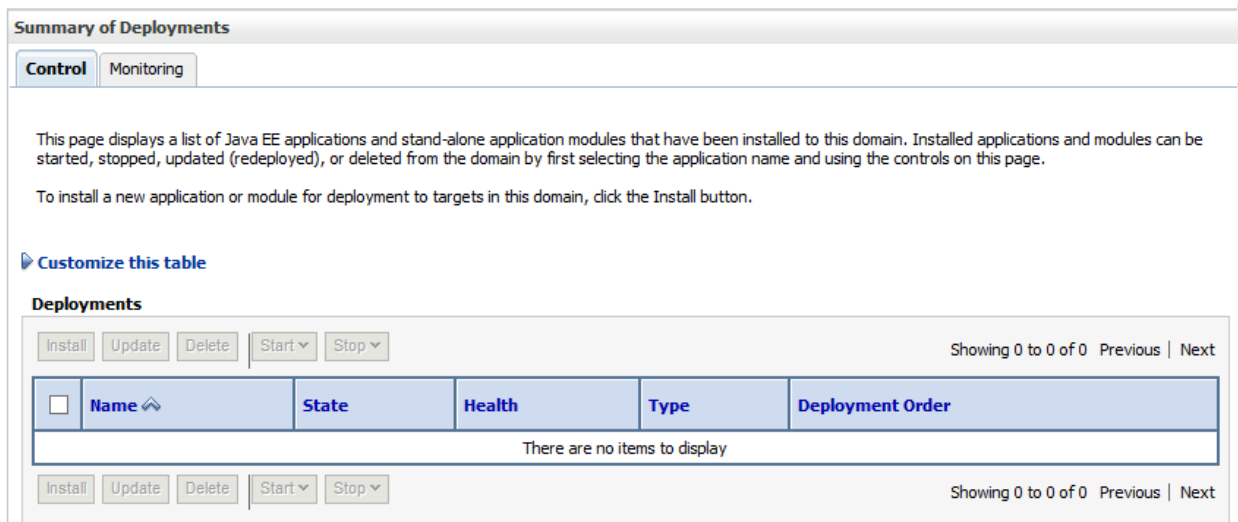


Figure 47: Summary of Deployments – DATUP Deployment Deleted

14. Verify that the DATUP deployment is deleted and no longer present.
15. Within the Change Center panel in the left column of the WebLogic console, click **Activate Changes**. For reference, see Figure 48: Activate Changes

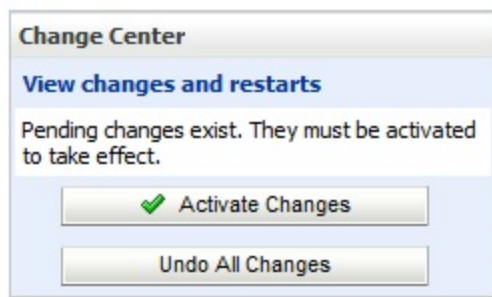


Figure 48: Activate Changes

4.2 Deploy New Release

To deploy the new release, follow the same deployment steps found in Section 3.6.2.

4.3 Backout Build

To backout the current DATUP build, follow the steps in Section 4.1 to uninstall the build. Then, follow the steps in Section 4.2 to deploy the previous build.

5 System Verification

The following section will verify that the DATUP system is up and running at a national site.

5.1 Verification

To verify that the national DATUP installation is up and running, navigate a web-browser to the logs directory on your server, example: **REDACTED**/DATUPLOGS.

Verify that the `server.log` file has an entry indicating the next scheduled run time of the DATUP application. The `server.log` entry looks like:

```
2024-05-20 09:34:20,721 DEBUG [[ACTIVE] ExecuteThread: '0' for queue: 'weblogic.kernel.Default (self-tuning)']  
REDACTED Message  
2024-05-20 09:34:20,774 DEBUG [[ACTIVE] ExecuteThread: '0' for queue: 'weblogic.kernel.Default (self-tuning)']  
REDACTED Defaulting to non-container managed timer.  
2024-05-20 09:34:20,778 DEBUG [[ACTIVE] ExecuteThread: '0' for queue: 'weblogic.kernel.Default (self-tuning)']  
REDACTED [ruleNextTimer] Next scheduled DIF update time: Mon, 05/20/2024, 09:55:00 AM, CDT  
2024-05-20 09:34:20,788 DEBUG [[ACTIVE] ExecuteThread: '0' for queue: 'weblogic.kernel.Default (self-tuning)']  
REDACTED [duration:init] Initializing FDB App Settings  
2024-05-20 09:34:20,823 DEBUG [[ACTIVE] ExecuteThread: '0' for queue: 'weblogic.kernel.Default (self-tuning)']  
REDACTED [duration:init] FDB using JNDI Name: 'datasource/FDB45-DIF'  
2024-05-20 09:34:20,823 DEBUG [[ACTIVE] ExecuteThread: '0' for queue: 'weblogic.kernel.Default (self-tuning)']
```

Figure 49: DATUP Server Log

This line indicates that the system is running.

(This page included for two-sided copying.)

Appendix A: DATUP Configuration

This appendix provides configuration file examples based on the baseline `fdb_datup4_configuration.properties` file. Configure the parameters in this file to match the settings of the particular environment into which you are installing. The `sftp.hostname`, `sftp.port`, `sftp.username`, `sftp.password`, `sftp.base.directory`, and `sftp.fdb.directory` must match the configuration of the sftp server.

The `fdb.flag.provider.url` value should be configured with the servername and port where DATUP is running.

The `file.name.fragment` and `file.search.type` should be configured to match the environment in which DATUP is being installed.

Example DATUP Configuration File

```
#####
#----- Scheduler -----
#####

#####
# Scheduled nightly update time (military time).
#
# For example, "0230" schedules the nightly update
# for 2:30 am.
#
# *This parameter applies to DATUP National
#####
scheduled.time=0630

#####
#----- sFTP Server -----
#####

#####
# SFTP server hostname
#
# Specify the SFTP server hostname.
#
# *This parameter applies to National
#####
sftp.hostname= REDACTEDva.gov

#####
# SFTP server port number
#
# Specify the SFTP server port number.
#
# *This parameter applies to National and Local.
#####
sftp.port= REDACTED
```

```

#####
# SFTP server username/password.
#
# Specify the anonymous account username/password.
#
# *These parameters apply to National and Local.
#####
sftp.username=presftp
sftp.password=password

#####
# SFTP server working directory
#
# Specify the SFTP working directory, relative to
# the SFTP root directory.
#
# *This parameter applies to National and Local.
#####
sftp.base.directory=/home/presftp/pecs_preprod/

#####
# Pending FDB45_DIF update storage directory.
#
# Specify the pending directory, relative to the
# working directory, to the location where FDB45_DIF
# full, incremental, and custom ZIP files will be
# placed for processing.
#
# *This parameter applies to National.
#####
sftp.fdb.directory=/home/presftp/pecs_preprod/fdb45_dif

#####
# File Name Fragment
#
# Specify the fragment of the file name to be used when searching for
# files to process.
# Production Environment value of "UPD"
# All Other Environments value of "I"
#
# *The search is case insensitive.
# *This parameter is used in conjunction with File Search Type
# (file.search.type)
# *This parameter applies to National.
#####
file.name.fragment=UPD

#####
# File Search Type
#
# Specify the search type that should be used.
#

```

```

# Production Environment value of "contains"
# All Other Environments value of "starts_with"
#
# *This parameter is used in conjunction with File Name Fragment
(file.name.fragment)
# *This parameter applies to National.
#####
file.search.type=contains
file.search.type=starts_with
#####
#----- FDB45_DIF -----
#####

#####
# Number of random FDB45_DIF verification tests
#
# Specify the number of random FDB45_DIF verification
# tests to run. 10 is a reasonable number. However,
# do not specify a large number as it will cause an
# unacceptable delay for processing new VistA order
# checks during that time.
#
# *This parameter applies to National and Local.
#####
fdb.verification.test.count=5

#####
# Comparison Reports Property
#
# This property is to be set to true if DATUP will
# need to wait on the PECS Application to finish
# running the Comparison Reports.
#
# In environments where PECS is not installed,
# set this to false to eliminate the dependency
# on PECS Comparison Reports running.
#
# *This parameter applies to National.
#####
comparison.reports=true

#####
# FDB Comparison Report Created Flag
#
# This property sets the default value for a boolean
# JNDI resource that will be created on the Weblogic
# Domain at startup.
# This boolean value (or flag) will be used by both
# Datup National and PECS to coordinate the processing
# of fdb files so PECS can make appropriate use
# such files before they are deleted by DATUP.
#

```

```

# *If this property is not defined, the default value
# will be set to false.
# *This parameter applies to National.
#####
fdb.comparison.report.created.flag=false

#####
#fdb.flag.provider.url
#
# Specifies the URL of the WebLogic Server that
# provides the naming context where the
# fdb_comparison_report_created_flag resource resides.
# i.e. t3://servername:port (t3 is Weblogic's protocol)
# This property is also defined in PECS, so the
# value on both properties should be the same.
#####
fdb.flag.provider.url=t3://<DeploymentServer>: REDACTED/console

#####
# FDB wait time for PECS run
#
# Specify the number of minutes that DATUP will
# wait for PECS to generate its FDB Customization
# report before trying to process the FDB45_DIF
# files again.
#
# Default value will be 20 minutes
# *This parameter applies to National.
#####
fdb.pecs.wait.time=180

#####
#----- Email Server -----
#####

#####
# Email server hostname
#
# *This parameter applies to National and Local.
#####
email.hostname= REDACTED

#####
# Email sender name
#
# For example, "noreply@va.gov".
#
# *This parameter applies to National and Local.
#####
email.sender= REDACTEDva.gov

```

```

#####
# Email username/password
#
# May be necessary to relay email.
#
# *These parameters apply to National and Local.
#####
email.username=
email.password=

#####
# Email list for success notifications
#
# Include individuals that should be notified about
# successful FDB/FDB-Custom updates.
#
# *This parameter applies to National and Local.
#####
email.list.success=PECPPSSysStatus@va.gov

#####
# Email list for failure notifications
#
# Include individuals that should be notified about
# failed FDB/FDB-Custom updates.
#
# *This parameter applies to National and Local.
#####
email.list.failure= REDACTEDva.gov

#####
# Email list for available update notifications
#
# Include individuals that should be notified about
# available FDB/FDB-Custom updates once they are
# applied and tested and National. This list should
# include the local site managers.
#
# *This parameter applies to National.
#####
image.email.sendto.local= REDACTEDva.gov

#####
#----- Locality -----
#####

#####
# Regional Data Center (RDC) name
#
# Specify the name of the RDC or leave blank if
# this installation is not part of a RDC.

```

```

#
# *This parameter applies to Local.
#####
locality.rdc.name=

#####
# Site number(s)
#
# Specify the site number(s) for this installation.
# If more than one site is associated with this
# installation, separate the site numbers with a
# comma (e.g., 423,512,211).
#
# *This parameter applies to Local.
#####
locality.site.number=

#####
# Number of retained FDB45_DIF incremental archives
#
# Due to potential site outages, it is necessary
# to retain a certain number of FDB45_DIF archives.
#
# *This parameter applies to National.
#####
fdb.retention=20

#####
# Number of statements to batch before commit
#
# Specify the number of statements to batch before
# a commit to the database. This value is database
# vendor and JDBC driver dependent. A reasonable
# batch size is 500. However, tests show that Cache
# may throw system errors with a batch size greater
# than 200.
#
# Specify a batch size of 0 to disable batching. A
# single commit will be issued at the end of the
# incremental update.
#
# *This parameter applies to National and Local.
#####
fdb.batch.commit.size=0

#####
#----- IMAGE PROCESSING-----
#####
image.processing.national=TRUE
image.processing.local=FALSE
#####
# The location where the image files will be stored

```



```

#
#
# *This parameter applies to National only
#####
image.directory.national=/tmp/imaging/

#####
# The location where the image files will be stored
#
#
# *This parameter applies to local only
#####
image.directory.local=/tmp/imaging/

#####
# The email to send to names or group
#
#
# *This parameter applies to National only
#####
image.email.sendto.local=REDACTEDva.gov

#####
# The email to send to names or group
#
#
# *This parameter applies to local only
#####
image.email.sendto.local=REDACTED.va.gov

```

Appendix B: Combined DATUP / PECS / PPS-N Architecture

This appendix provides the combined DATUP / PECS / PPS-N architecture diagram for reference. The combined logical system components are:

1. DATUP – Implements the FDB45_DIF update business logic.
2. Scheduler – Background process for scheduling DATUP.
3. WebLogic – Application server environment.
4. Configuration File – Defines the DATUP configuration settings.
5. Email Templates – Templated emails for notifications sent to Managers.
6. PRE FTP Server – FTP Server that hosts the FDB45_DIF update archives.
7. Email Server – Email relay server.
8. PECS – Implements VA Customizations business logic.
9. CTSTAGING Database – Stores PECS FDB-Custom modifications.
10. DATUP Database – Stores DATUP site update history.
11. FDB45_DIF Database – Stores the FDB45_DIF drug database.

Figure 50 illustrates the logical system components for the National environments. The components are responsible for verifying and publishing FDB45_DIF and FDB-Custom updates to the FTP Server.

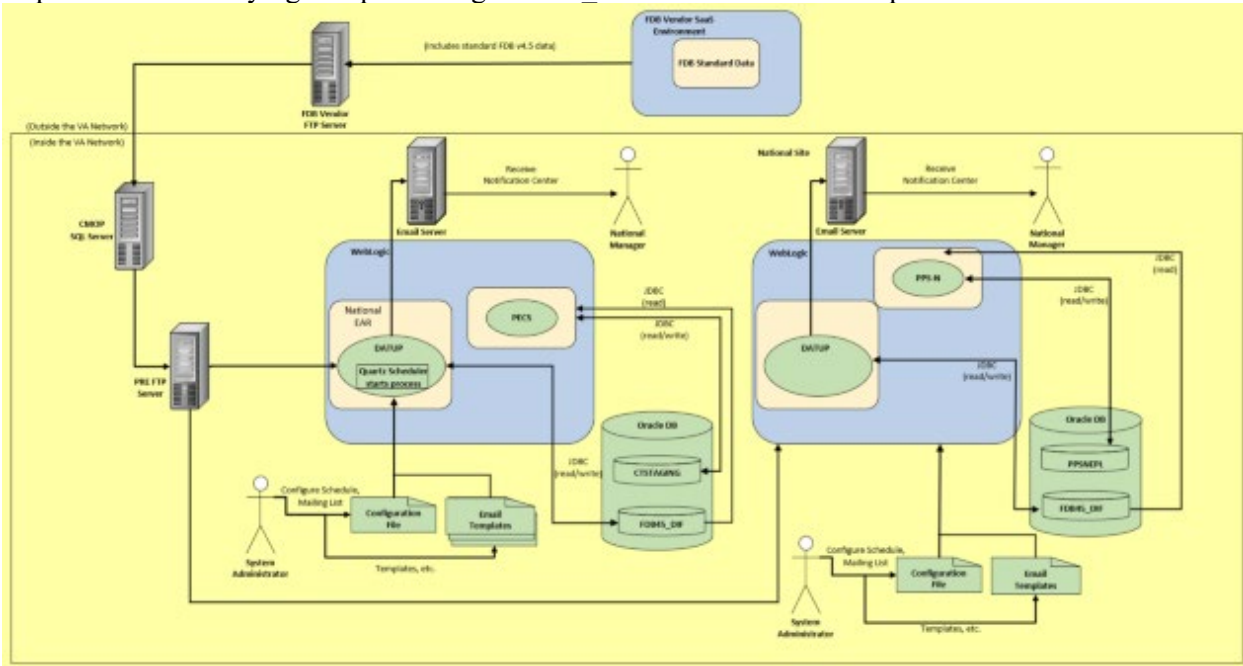


Figure 50: Combined DATUP/PECS/PPS-N Architecture Diagram

Appendix C: log4j2.xml

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<!-- Configuration has an attribute named status that you can set to trace or debug to get configuration messages from Log4J2. -->
```

```
<Configuration>
```

```
  <Properties>
```

```
    <Property name="logDir">DATUPLOGS</Property>
```

```
    <Property name="maxFileSize">10 MB</Property>
```

```
    <Property name="maxRolloverFiles">10</Property>
```

```
    <Property name="logPattern">%d{DEFAULT} %-5p [%t] [%c:%M]
    %m%n</Property>
```

```
  </Properties>
```

```
  <Appenders>
```

```
    <Console name="ConsoleAppender" target="SYSTEM_OUT">
```

```
      <PatternLayout>
```

```
        <Pattern>${logPattern}</Pattern>
```

```

        </PatternLayout>
    </Console>

    <RollingFile name="ApacheAppender" filename="${logDir}/apache.log"
filePattern="${logDir}/apache-%i.log">
        <PatternLayout>
            <Pattern>${logPattern}</Pattern>
        </PatternLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="${maxFileSize}" />
        </Policies>
        <DefaultRolloverStrategy max="${maxRolloverFiles}" />
    </RollingFile>

    <RollingFile name="PepsAppender" fileName="${logDir}/peps.log"
filePattern="${logDir}/peps-%i.log">
        <PatternLayout>
            <Pattern>${logPattern}</Pattern>
        </PatternLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="${maxFileSize}" />
        </Policies>
        <DefaultRolloverStrategy max="${maxRolloverFiles}" />
    </RollingFile>

    <RollingFile name="FileAppender" fileName="${logDir}/server.log"
filePattern="${logDir}/server-%i.log">
        <PatternLayout>
            <Pattern>${logPattern}</Pattern>
        </PatternLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="${maxFileSize}" />
        </Policies>

```

```

        <DefaultRolloverStrategy max="{maxRolloverFiles}"/>
    </RollingFile>

    <RollingFile name="HibernateAppender" fileName="{logDir}/hibernate.log"
filePattern="{logDir}/hibernate-%i.log">
        <HTMLLayout>
            <LocationInfo>true</LocationInfo>
            <Title>DATUP Log</Title>
        </HTMLLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="1000 MB" />
        </Policies>
        <DefaultRolloverStrategy max="{maxRolloverFiles}"/>
    </RollingFile>

    <RollingFile name="SpringAppender" fileName="{logDir}/spring.log"
filePattern="{logDir}/spring-%i.log">
        <PatternLayout>
            <Pattern>{logPattern}</Pattern>
        </PatternLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="{maxFileSize}" />
        </Policies>
        <DefaultRolloverStrategy max="{maxRolloverFiles}"/>
    </RollingFile>

    <RollingFile name="StrutsAppender" fileName="{logDir}/struts.log"
filePattern="{logDir}/struts-%i.log">
        <PatternLayout>
            <Pattern>{logPattern}</Pattern>
        </PatternLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="{maxFileSize}" />

```

```

        </Policies>
        <DefaultRolloverStrategy max="{maxRolloverFiles}"/>
    </RollingFile>

    <RollingFile name="CT" fileName="{logDir}/ct_prod.log"
filePattern="{logDir}/ct_prod-%i.log">
        <PatternLayout>
            <Pattern>{logPattern}</Pattern>
        </PatternLayout>
        <Policies>
            <OnStartupTriggeringPolicy />
            <SizeBasedTriggeringPolicy size="{maxFileSize}" />
        </Policies>
        <DefaultRolloverStrategy max="{maxRolloverFiles}"/>
    </RollingFile>
</Appenders>
<Loggers>
    <logger name="org.apache.commons" level="warn" additivity="false">
        <AppenderRef ref="ApacheAppender" />
    </logger>

    <logger name="gov.va.med.pharmacy.peps" level="debug" additivity="false">
        <AppenderRef ref="PepsAppender" />
    </logger>

    <logger name="gov.va.med.pharmacy.ct" level="debug" additivity="false">
        <AppenderRef ref="PepsAppender" />
    </logger>

    <logger name="gov.va.med.monitor.time.AuditTimer" level="info" additivity="false">
        <AppenderRef ref="FileAppender"/>
    </logger>

    <logger name="org.apache.beehive.netui.pageflow.internal.AdapterManager"
level="warn" additivity="false">
        <AppenderRef ref="FileAppender"/>
    </logger>

```

```

<logger name="org.hibernate" level="error" additivity="false">
    <AppenderRef ref="HibernateAppender" />
</logger>

<logger name="org.aspectj" level="error" additivity="false">
    <AppenderRef ref="SpringAppender" />
</logger>

<logger name="org.springframework" level="error" additivity="false">
    <AppenderRef ref="SpringAppender" />
</logger>

<logger name="org.apache.struts2" level="error" additivity="false">
    <AppenderRef ref="StrutsAppender" />
</logger>

<logger name="com.opensymphony.xwork2" level="error" additivity="false">
    <AppenderRef ref="StrutsAppender" />
</logger>

<logger name="org.apache.commons.digester" level="error" additivity="false">
    <AppenderRef ref="StrutsAppender" />
</logger>

<logger name="org.apache.tiles" level="error" additivity="false">
    <AppenderRef ref="StrutsAppender" />
</logger>

<logger name="net.sf.navigator" level="error" additivity="false">
    <AppenderRef ref="StrutsAppender" />
</logger>

<Root level="error">
    <AppenderRef ref="ConsoleAppender"/>
</Root>
</Loggers>
</Configuration>

```

Appendix D: Rollback Process

If the installation process must be stopped when updating an environment from a previous version of DATUP National, follow the steps outlined in order to rollback the application.

1. Follow the PECS and PPS-N Rollback Process.
2. Deploy the old DATUP National EAR file.